



100V/15A N-Channel Advanced Power MOSFET

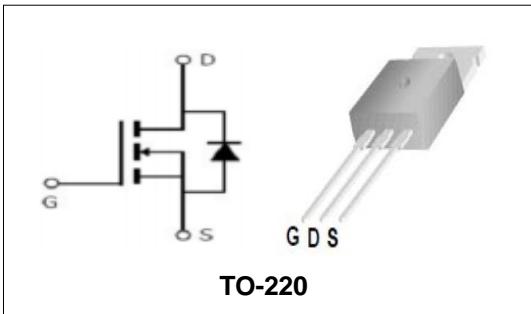
Features

- Fast Switching
- 100% Avalanche test

BVDSS	100	V
ID	15	A
RDSON@VGS=10V	70	mΩ
RDSON@VGS=4.5V	84	mΩ

Applications

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)

**Order Information**

Product	Package	Marking	Tube	Carton
PTP15N10	TO-220	PTP15N10	50PCS	5000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
V _{(BR)DSS}	Drain-Source Breakdown Voltage	100	V
V _{GS}	Gate-Source Voltage	±20	V
T _J	Maximum Junction Temperature	150	°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
I _S	Diode Continuous Forward Current	15	A

Mounted on Large Heat Sink

E _{AS}	Single Pulse Avalanche Energy (Note1)	9	mJ	
I _{DM}	Pulse Drain Current Tested (Silicon Limit) (Note2)	TC =25°C	40	A
I _D	Continuous Drain current	TC =25°C	15	A
P _D	Maximum Power Dissipation	TC =25°C	30	W
R _{θJC}	Thermal Resistance Junction-to-Case (Note3)		5	°C/W
R _{θJA}	Thermal Resistance Junction-to-Ambient (Note3)		60	°C/W

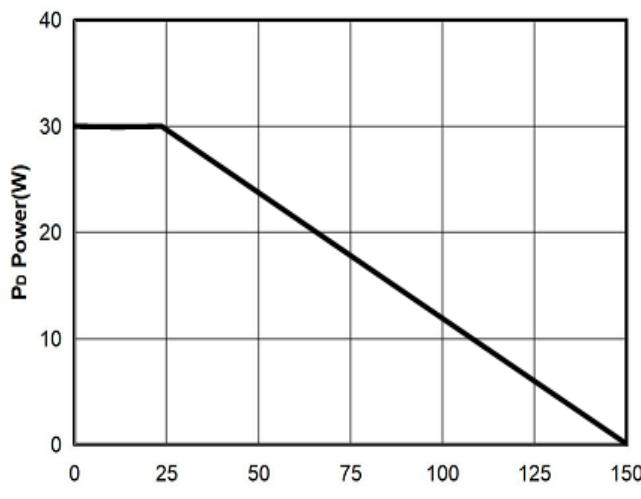
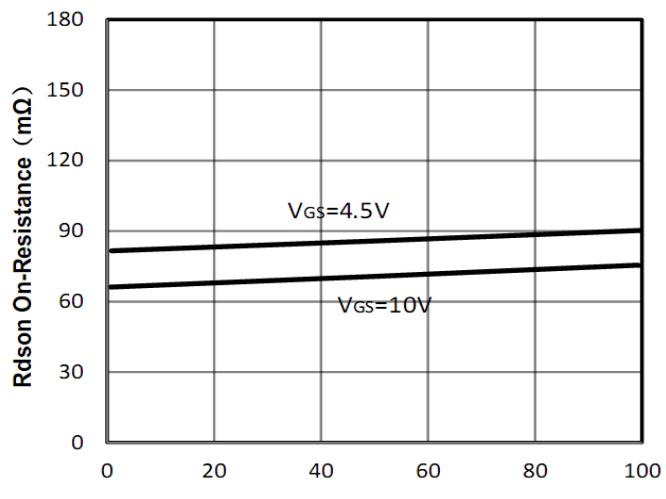
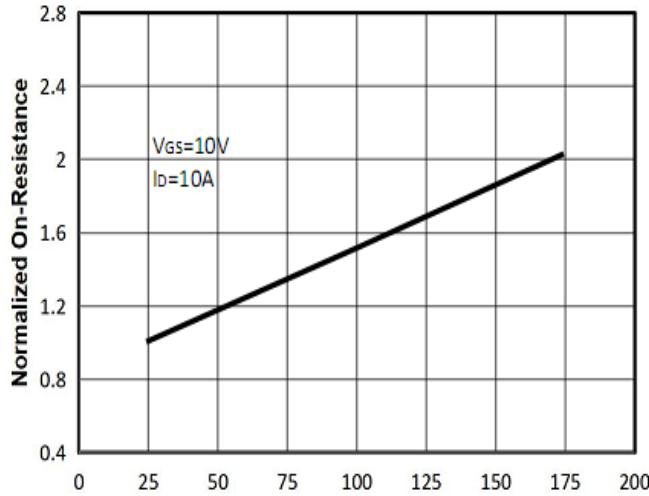
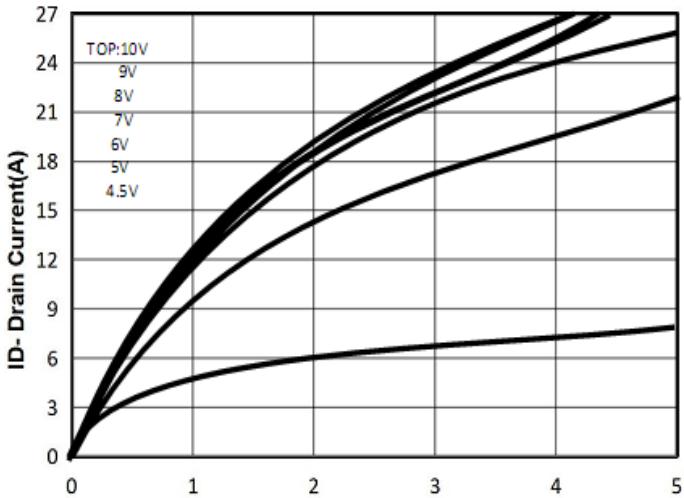
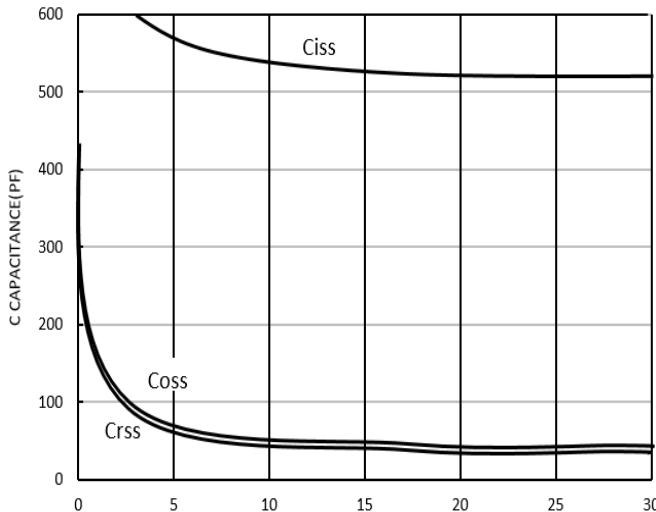
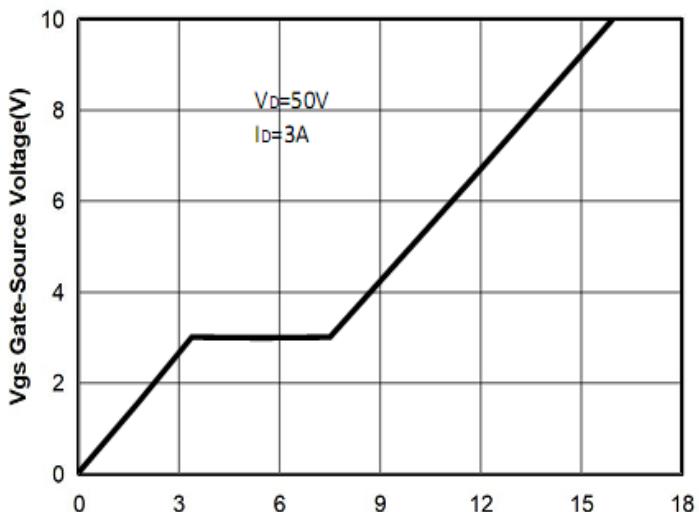


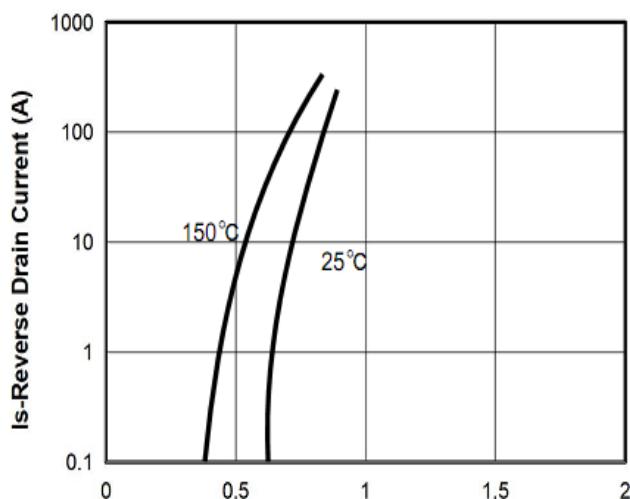
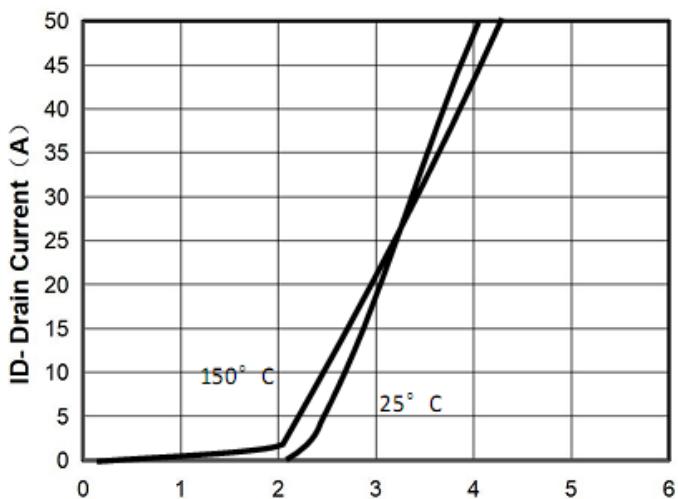
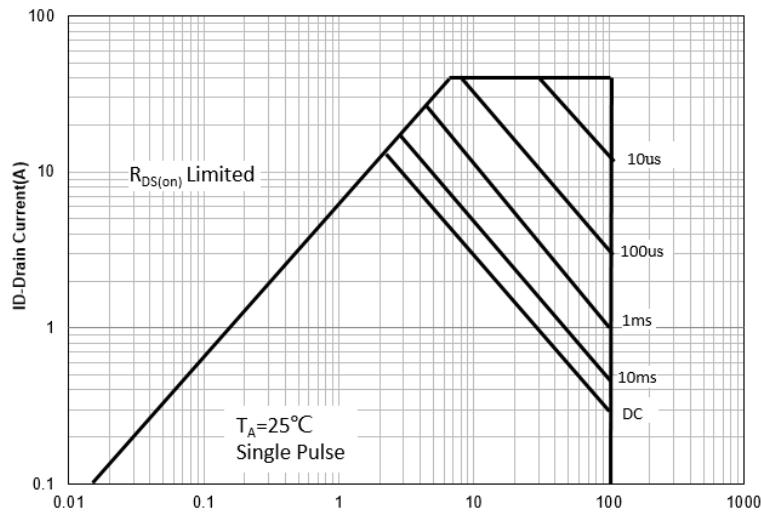
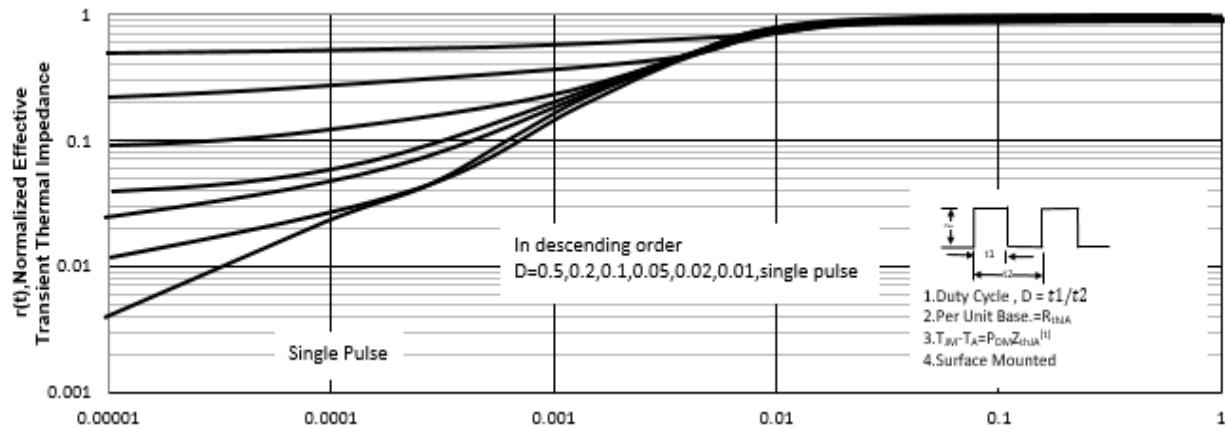
100V/15A N-Channel Advanced Power MOSFET

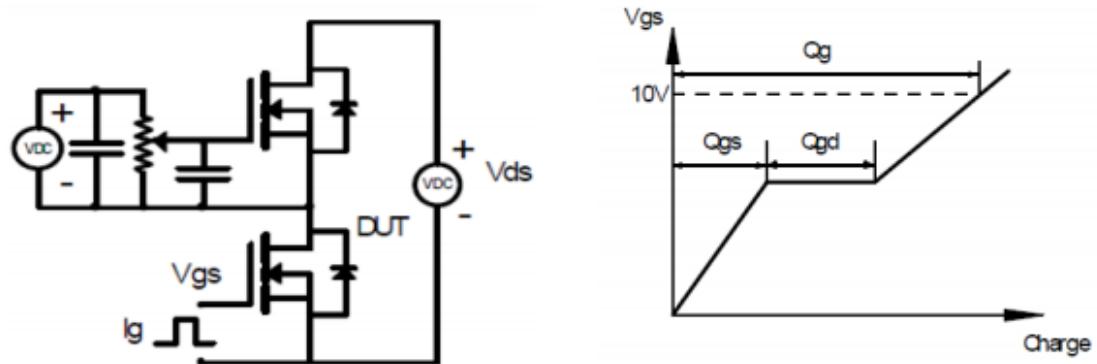
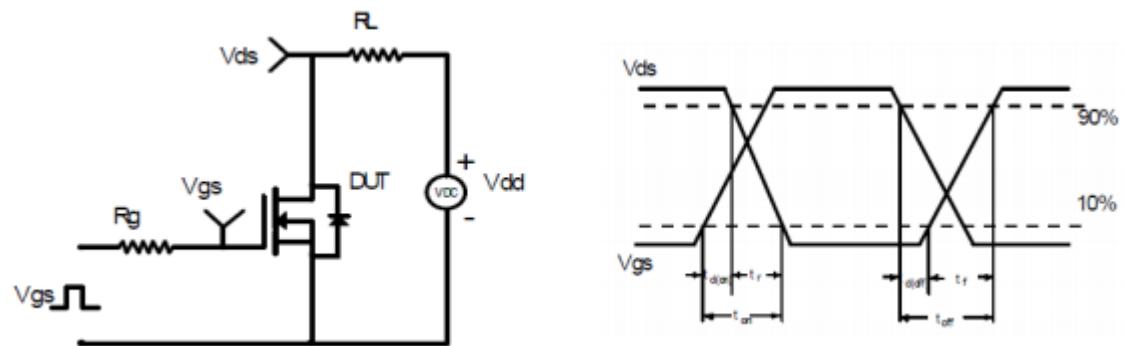
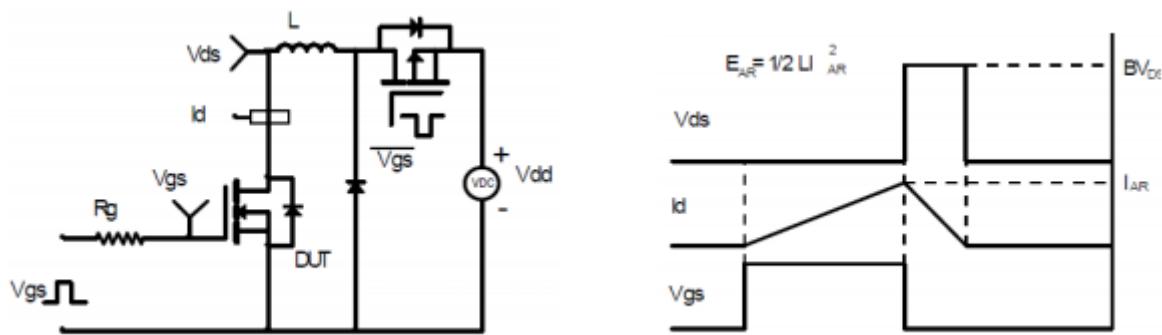
Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ $T_J = 25^\circ C$ (unless otherwise stated)						
$V_{(BR)DSS}$	Drain- Source Breakdown Voltage	$V_{GS}=0V, ID=250\mu A$	100	--	--	V
I_{DSS}	Zero Gate Voltage Drain current	$V_{DS}=100V, V_{GS}=0V$	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	--	--	± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, ID=250\mu A$	1	2	3	V
$R_{DS(ON)}$	Drain-Source On-State Resistance (Note4)	$V_{GS}=10V, ID=10A$	--	70	100	mΩ
		$V_{GS}=4.5V, ID=8A$	--	84	110	
Dynamic Electrical Characteristics @ $T_J = 25^\circ C$ (unless otherwise stated) (Note5)						
C_{iss}	Input Capacitance	$V_{DS}=30V, V_{GS}=0V, F=1MHz$	--	525	--	pF
C_{oss}	Output Capacitance		--	41	--	pF
C_{rss}	Reverse Transfer Capacitance		--	36	--	pF
Q_g	Total Gate Charge	$V_{DS}=50V, ID=3A, V_{GS}=10V$	--	15.6	--	nC
Q_{gs}	Gate-Source Charge		--	3.2	--	nC
Q_{gd}	Gate-Drain Charge		--	4.4	--	nC
Switching Characteristics (Note5)						
$t_{d(on)}$	Turn-on Delay Time	$V_{DD}=50V, ID=1A, V_{GS}=4.5V, RG=6.8\Omega$	--	8	--	nS
t_r	Turn-on Rise Time		--	4.5	--	nS
$t_{d(off)}$	Turn-off Delay Time		--	26	--	nS
t_f	Turn-off Fall Time		--	3.8	--	nS
Source- Drain Diode Characteristics@ $T_J = 25^\circ C$ (unless otherwise stated)						
V_{SD}	Forward on voltage	$I_S=10A, V_{GS}=0V$	--	0.89	1.2	V
t_{rr}	Reverse Recovery Time	$I_S=10V, V_{GS}=0V, dI/dt=100A/us$	--	26	--	nS
Q_{rr}	Reverse Recovery Charge		--	115	--	nC

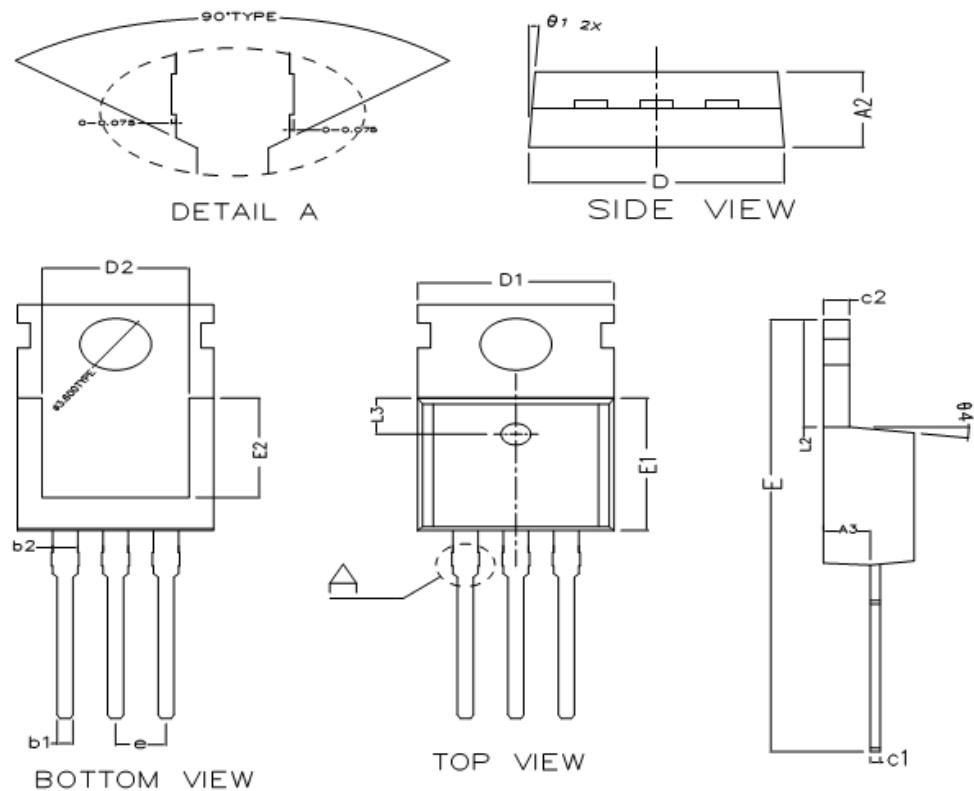
Note:

1. Limited by T_{Jmax} , starting $T_J = 25^\circ C$, $RG = 25\Omega$, $VD = 50V$, $VGS = 10V$. Part not recommended for use above this value.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. Surface Mounted on FR4 Board, $t \leq 10$ sec.
4. Pulse Test: pulse width ≤ 300 us, duty cycle $\leq 2\%$.
5. Guaranteed by design, not subject to production testing.

100V/15A N-Channel Advanced Power MOSFET
Typical Characteristics

Figure1: T_J Junction Temperature (°C)

Figure2: I_D Drain Current (A)

Figure3: T_J Junction Temperature (°C)

Figure4: V_D Drain-Source Voltage (V)

Figure5: V_D Drain-Source Voltage (V)

Figure6: Q_g Gate Charge (nC)

100V/15A N-Channel Advanced Power MOSFET

Figure7: V_{sd} Source-Drain Voltage (V)

Figure8: V_{gs} Gate-Source Voltage (V)

Figure9: V_{DS} Drain -Source Voltage (V)

Figure10: Square Wave Pulse Duration (sec)

100V/15A N-Channel Advanced Power MOSFET
Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

100V/15A N-Channel Advanced Power MOSFET
TO-220 Package Outline Dimensions (Units: mm)


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A2	4.470	4.570	4.670
A3	2.300	2.350	2.400
b1	0.750	0.800	0.850
b2	1.27 TYPE		
c1	0.450	0.500	0.550
c2	1.250	1.300	1.380
D	9.900	10.000	10.100
D1	10.000TYPE		
D2	8.000TYPE		
E	28.660	28.860	29.060
E1	9.000	9.100	9.200
E2	7.000TYPE		
e	2.540TYPE		
L2	6.350	6.500	6.650
L3	2.50TYPE		
θ1	3° TYPE		
θ2	3° TYPE		
θ3	7° TYPE		
θ4	7° TYPE		