



60V/80A N-Channel Advanced Power MOSFET

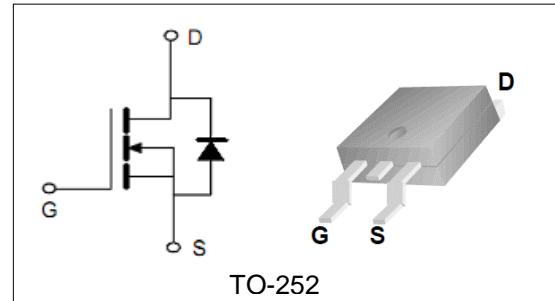
Features

- Improved dv/dt Capability, High Ruggedness.
- Maximum Junction Temperature Range (150°C)
- 100% Avalanche Tested

BVDSS	60	V
ID	80	A
RDSON@VGS=10V	6.3	mΩ

Applications

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)

**Order Information**

Product	Package	Marking	Reel Size	Reel	Carton
PTD80N06	TO-252	PTD80N06	13inch	2500PCS	50000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
V _{(BR)DSS}	Drain-Source Breakdown Voltage	60	V
V _{GS}	Gate-Source Voltage	±25	V
T _J	Maximum Junction Temperature	150	°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
I _S	Diode Continuous Forward Current	80	A
Mounted on Large Heat Sink			
E _{AS}	Single Pulse Avalanche Energy (Note1)	246	mJ
I _{DM}	Pulse Drain Current Tested (Silicon Limit) (Note2)	320	A
I _D	Continuous Drain current	80	A
P _D	Maximum Power Dissipation	100	W
R _{θJC}	Thermal Resistance Junction-to-Case (Note3)	1.3	°C/W
R _{θJA}	Thermal Resistance Junction-to-Ambient (Note3)	62.5	°C/W

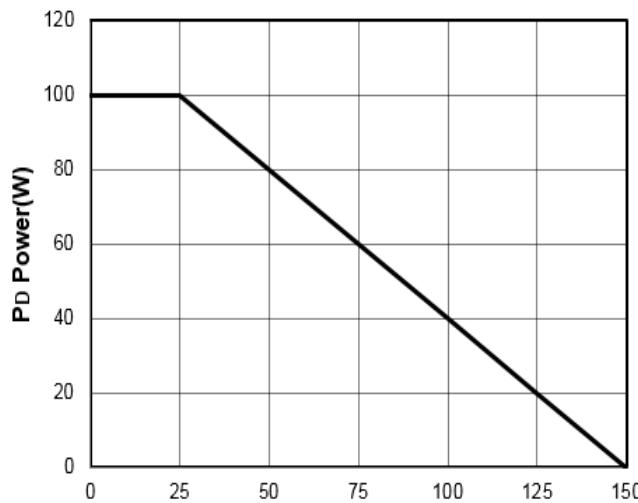
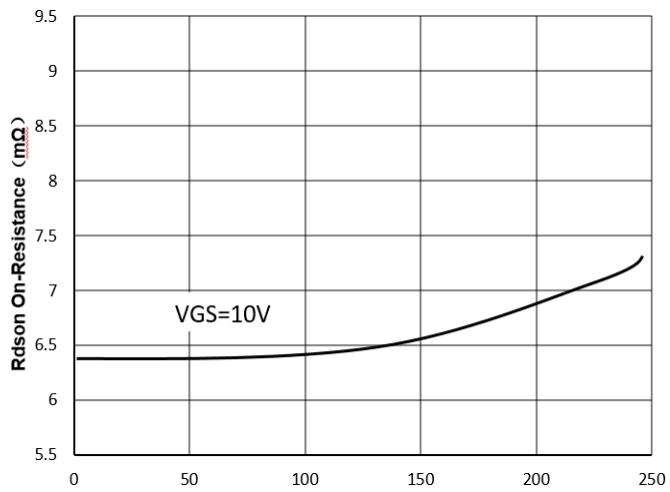
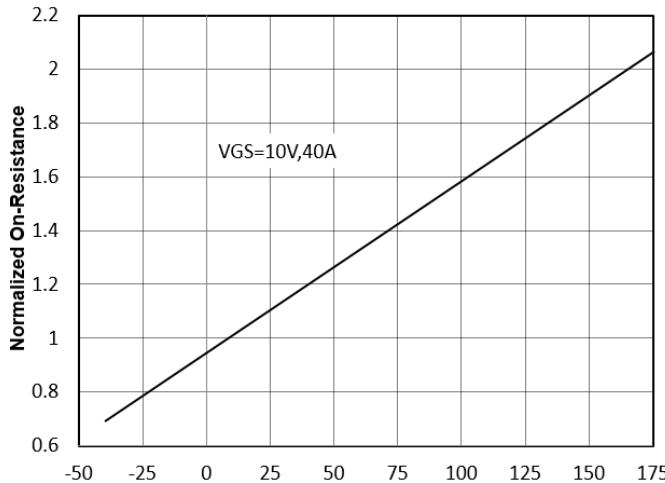
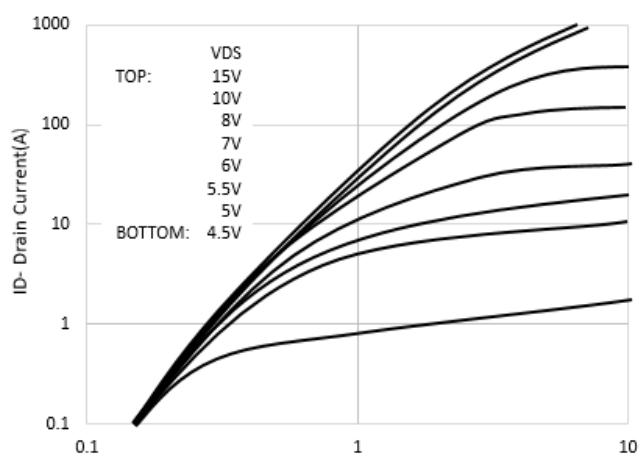
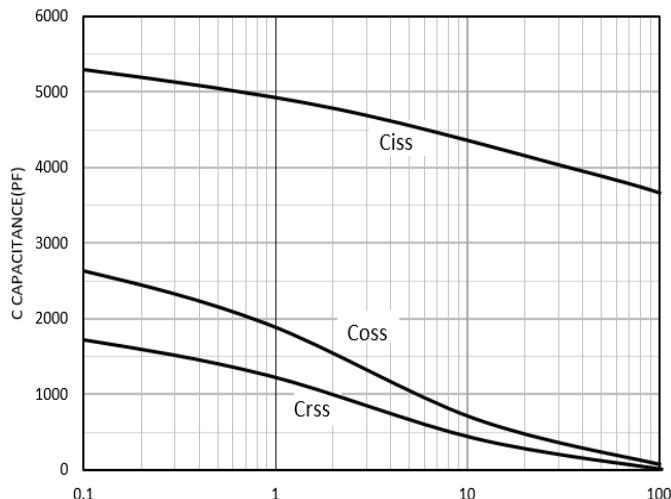
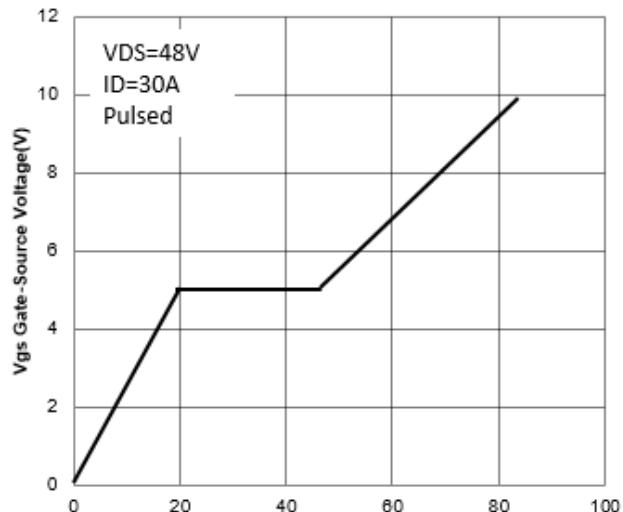


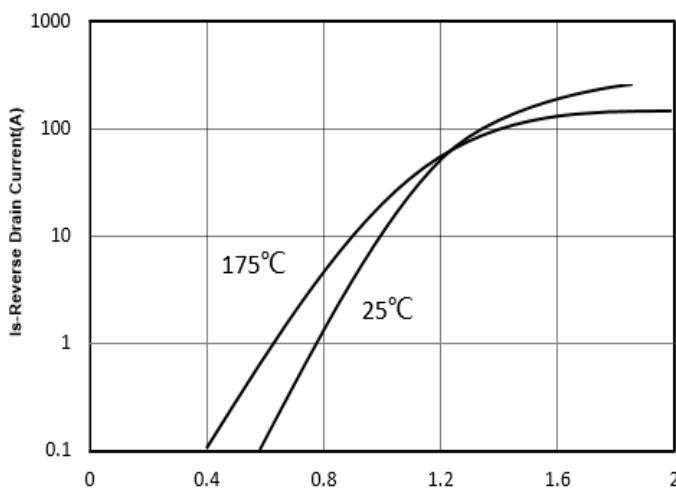
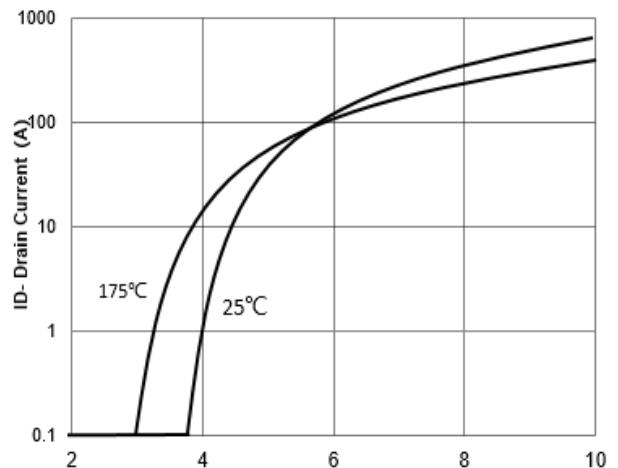
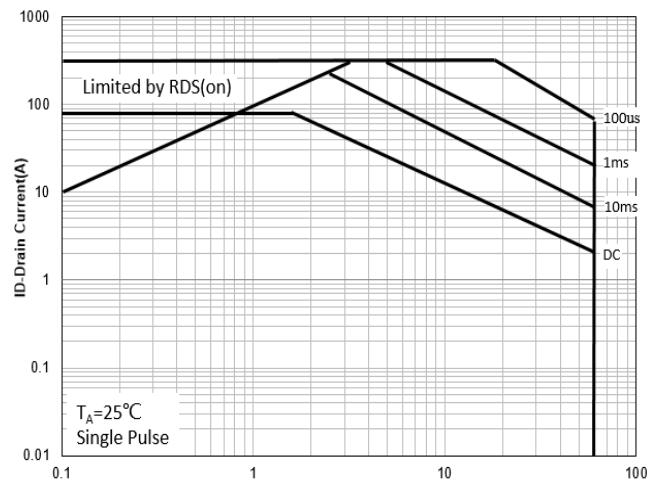
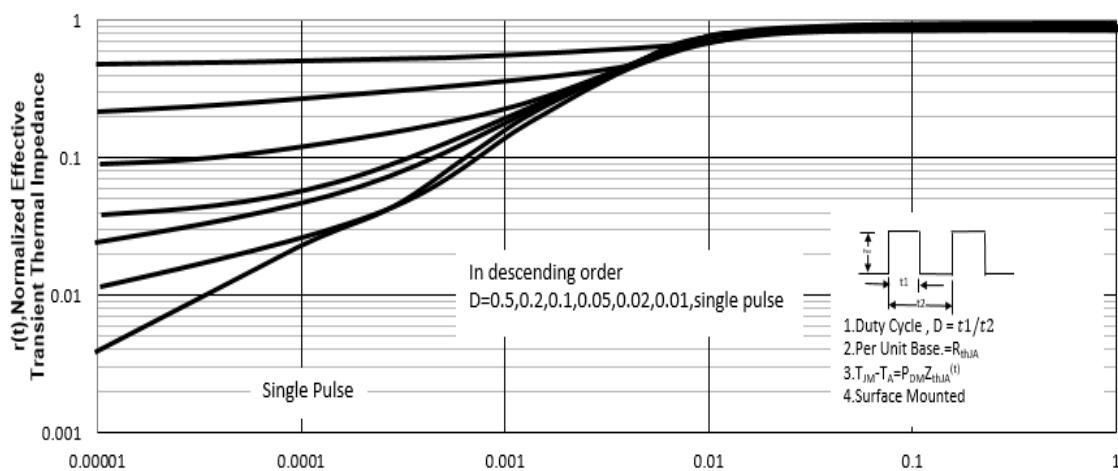
60V/80A N-Channel Advanced Power MOSFET

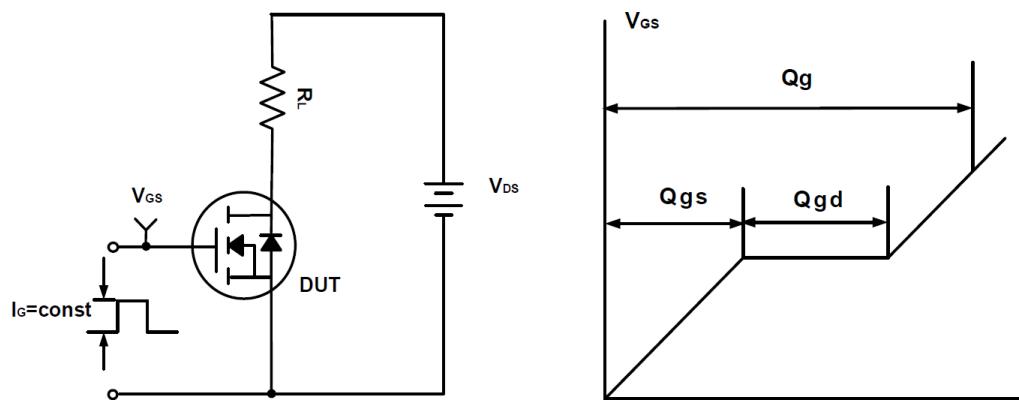
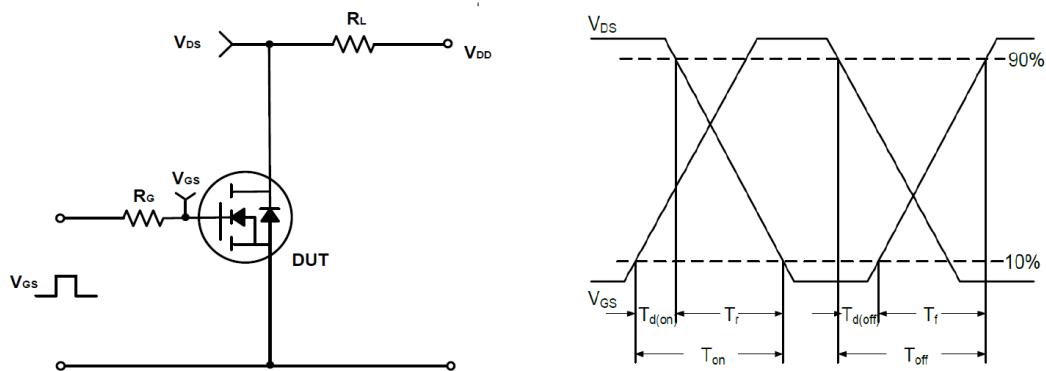
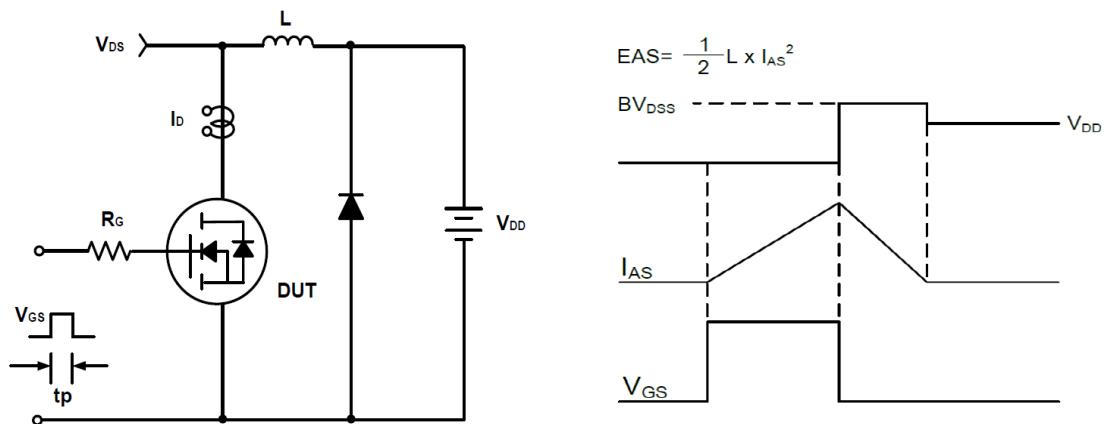
Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
$V_{(BR)DSS}$	Drain- Source Breakdown Voltage	$VGS=0V$ $ID=250\mu A$	60	--	--	V
I_{DSS}	Zero Gate Voltage Drain current	$VDS=60V$, $VGS=0V$	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	$VGS=\pm 25V$, $VDS=0V$	--	--	± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$VDS=VGS$, $ID=250\mu A$	2	3	4	V
$R_{DS(ON)}$	Drain-Source On-State Resistance (Note4)	$VGS=10V$, $ID=40A$	--	6.3	8	$m\Omega$
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note5)						
C_{iss}	Input Capacitance	$VDS=25V$, $VGS=0V$, $F=1MHz$	--	4100	--	pF
C_{oss}	Output Capacitance		--	370	--	pF
C_{rss}	Reverse Transfer Capacitance		--	260	--	pF
Q_g	Total Gate Charge	$VDS=48V$ $ID=40A$ $VGS=10V$	--	90	--	nC
Q_{gs}	Gate-Source Charge		--	20	--	nC
Q_{gd}	Gate-Drain Charge		--	31	--	nC
Switching Characteristics (Note5)						
$t_{d(on)}$	Turn-on Delay Time	$VDD=34V$, $ID=40A$, $VGS=10V$	--	55	--	nS
t_r	Turn-on Rise Time		--	65	--	nS
$t_{d(off)}$	Turn-off Delay Time		--	140	--	nS
t_f	Turn-off Fall Time		--	50	--	nS
Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)						
V_{SD}	Forward on voltage	$IS=40A$, $VGS=0V$	--	--	1.3	V

Note:

- Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD = 30V, VGS = 10V. Part not recommended for use above this value.
- Repetitive Rating: Pulse width limited by maximum junction temperature.
- Surface Mounted on FR4 Board, t ≤ 10 sec.
- Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.

60V/80A N-Channel Advanced Power MOSFET
Typical Characteristics

Figure1: T_J Junction Temperature (°C)

Figure2: I_D Drain Current (A)

Figure3: T_J Junction Temperature (°C)

Figure4: V_{DS} Drain-Source Voltage (A)

Figure5: V_{DS} Drain-Source Voltage (V)

Figure6: Q_g Gate Charge (nC)

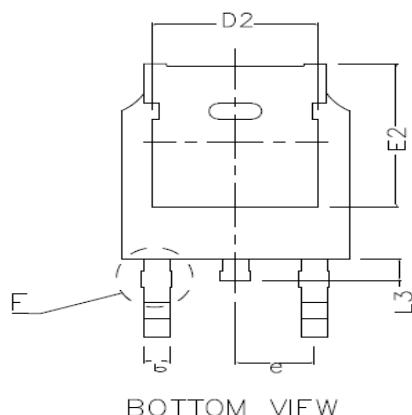
60V/80A N-Channel Advanced Power MOSFET

Figure7: V_{SD} Source-Drain Voltage (V)

Figure8: V_{GS} Gate-Source Voltage (V)

Figure9: V_{DS} Drain -Source Voltage (V)

Figure10: Square Wave Pulse Duration (sec)

60V/80A N-Channel Advanced Power MOSFET
Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

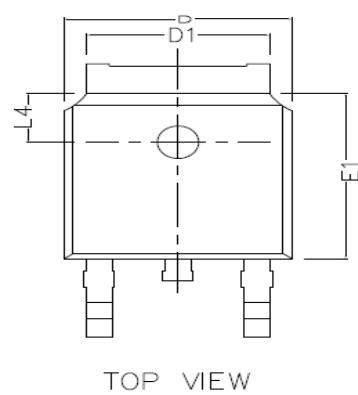


60V/80A N-Channel Advanced Power MOSFET

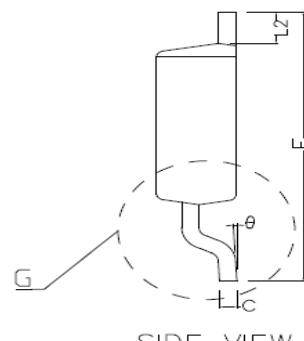
TO-252 Package Outline Dimensions (Units: mm)




BOTTOM VIEW



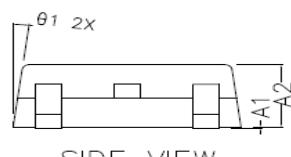
TOP VIEW



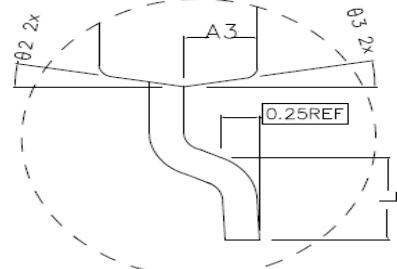
SIDE VIEW



DETAIL F



SIDE VIEW



DETAIL G

COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A1	0.000	0.100	0.150
A2	2.200	2.300	2.400
A3	1.020	1.070	1.120
b	0.710	0.760	0.810
c	0.460	0.508	0.550
D	6.500	6.600	6.700
D1	5.330REF		
D2	4.830REF		
E	9.900	10.100	10.300
E1	6.000	6.100	6.200
E2	5.600REF		
e	2.286TYPE		
L	1.400	1.550	1.700
L2	1.10REF		
L3	0.80REF		
L4	1.80REF		
θ	0~8°		
θ1	7° TYPE		
θ2	10° TYPE		
θ3	10° TYPE		