



60V/65A N-Channel Advanced Power MOSFET

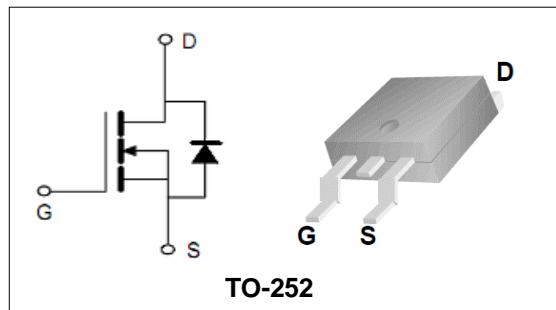
Features

- Improved dv/dt Capability, High Ruggedness.
- Maximum Junction Temperature Range (150°C)
- 100% Avalanche Tested

BVDSS	60	V
ID	65	A
RDSON@VGS=10V	9.3	mΩ

Applications

- Power Supply
- DC-DC Converters
- Uninterruptible Power Supply (UPS)
- Battery Management System

**Order Information**

Product	Package	Marking	Reel Size	Reel	Carton
PTD60N06	TO-252	PTD60N06	13inch	2500PCS	50000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit	
Common Ratings (TC=25°C Unless Otherwise Noted)				
V _{(BR)DSS}	Drain-Source Breakdown Voltage	60	V	
V _{GS}	Gate-Source Voltage	±25	V	
T _J	Maximum Junction Temperature	150	°C	
T _{STG}	Storage Temperature Range	-55 to 150	°C	
I _S	Diode Continuous Forward Current	TC =25°C	50	A

Mounted on Large Heat Sink

E _{AS}	Single Pulse Avalanche Energy (Note1)	95	mJ	
I _{DM}	Pulse Drain Current Tested (Silicon Limit) (Note2)	TC =25°C	250	A
I _D	Continuous Drain current	TC =25°C	65	A
P _D	Maximum Power Dissipation	TC =25°C	64	W
R _{θJC}	Thermal Resistance Junction-to-Case (Note3)		2	°C/W
R _{θJA}	Thermal Resistance Junction-to-Ambient (Note3)		110	°C/W

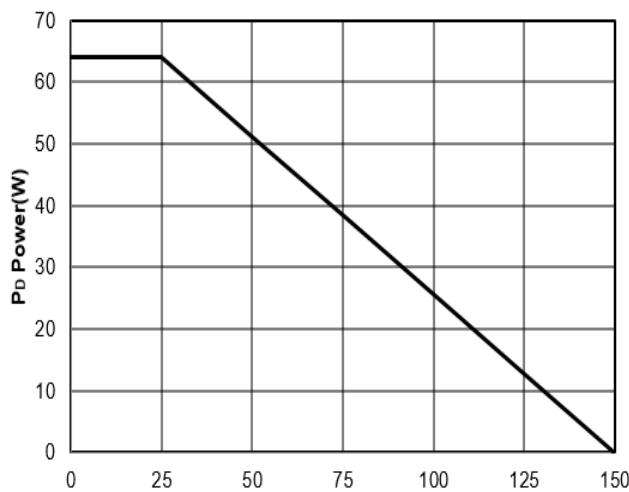
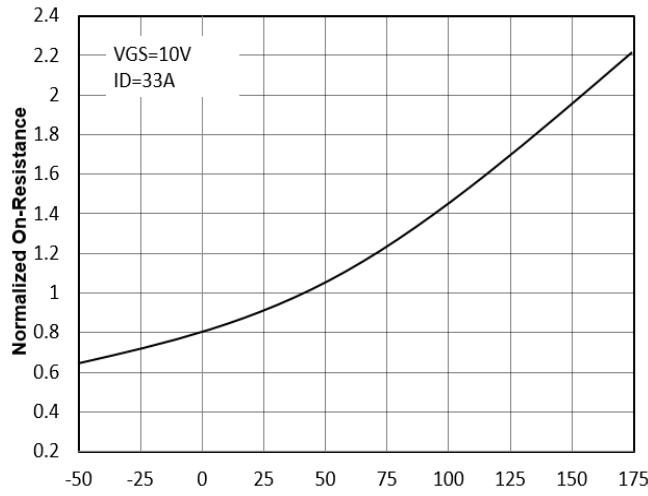
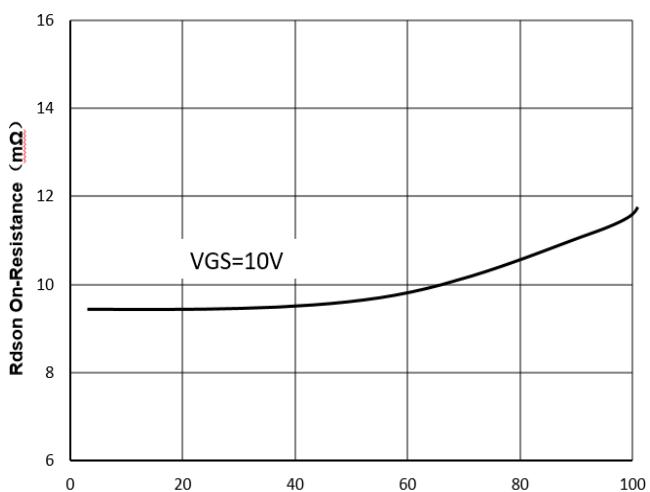
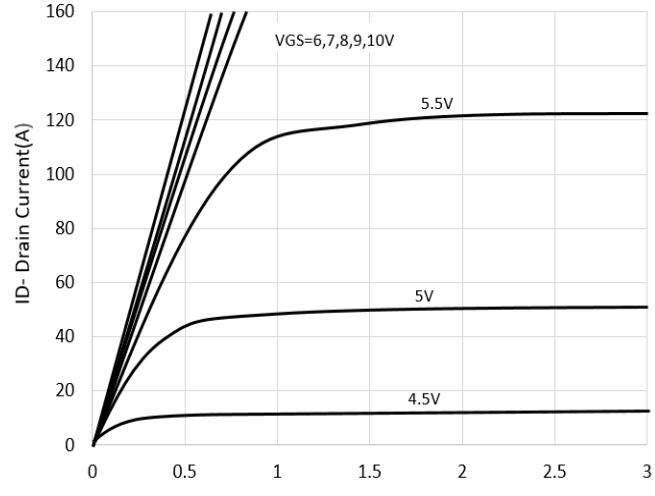
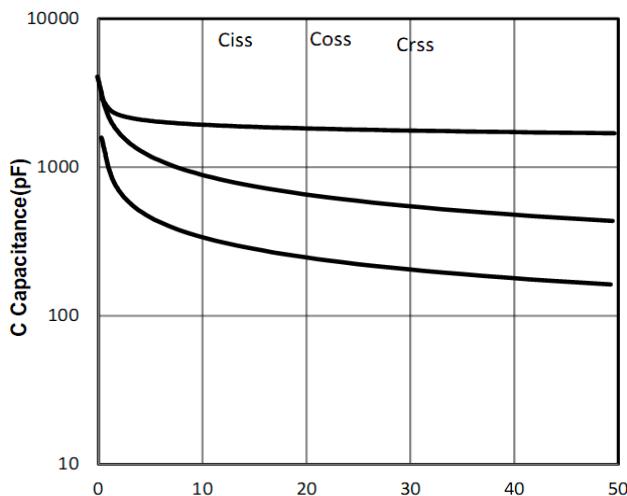
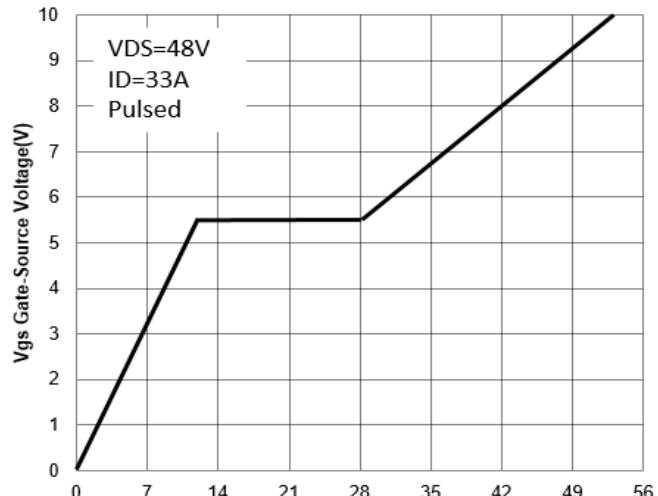


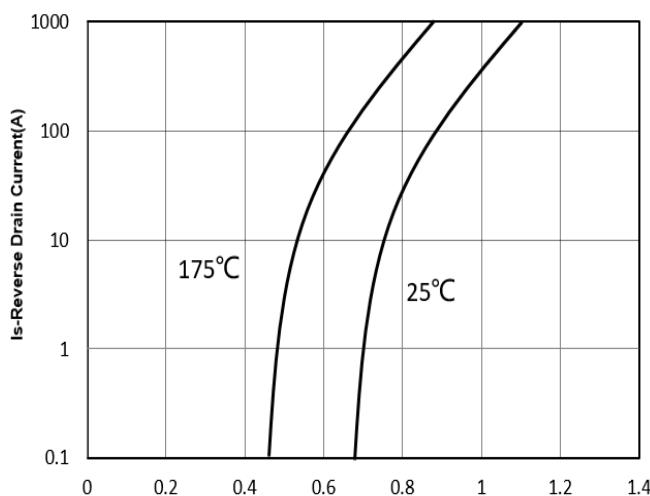
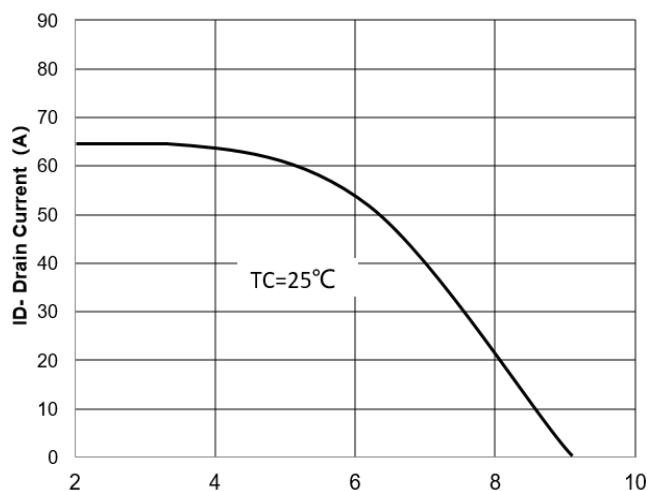
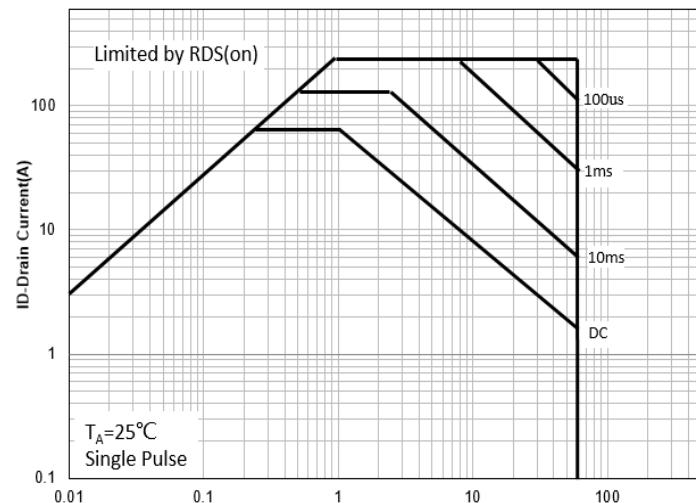
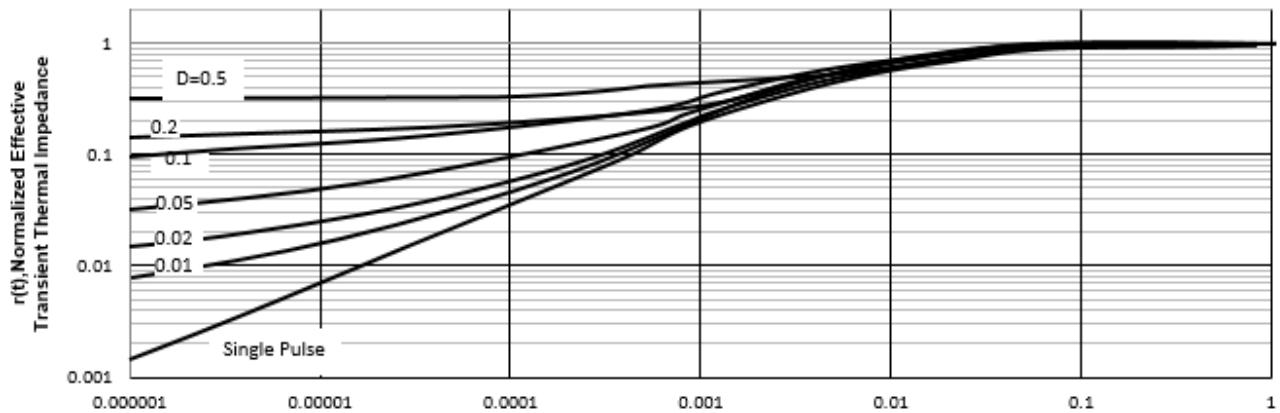
60V/65A N-Channel Advanced Power MOSFET

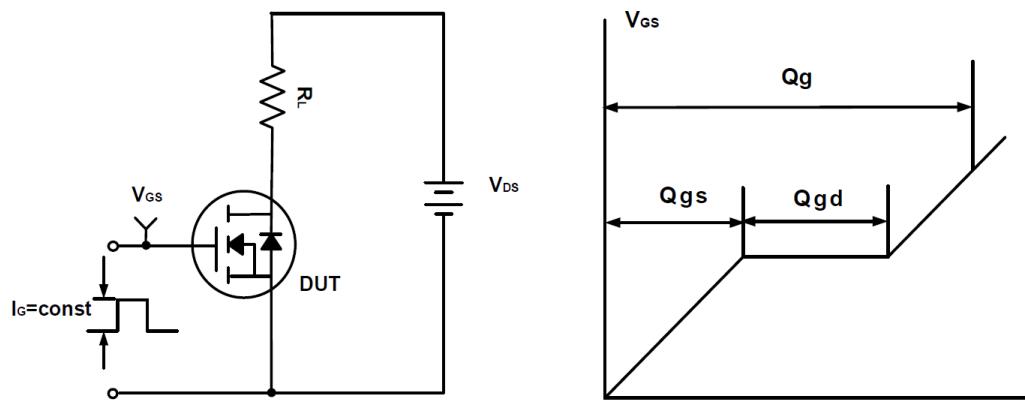
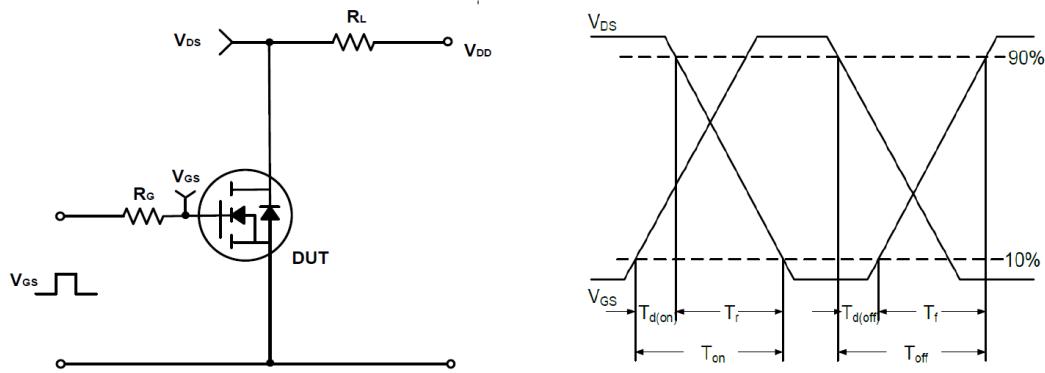
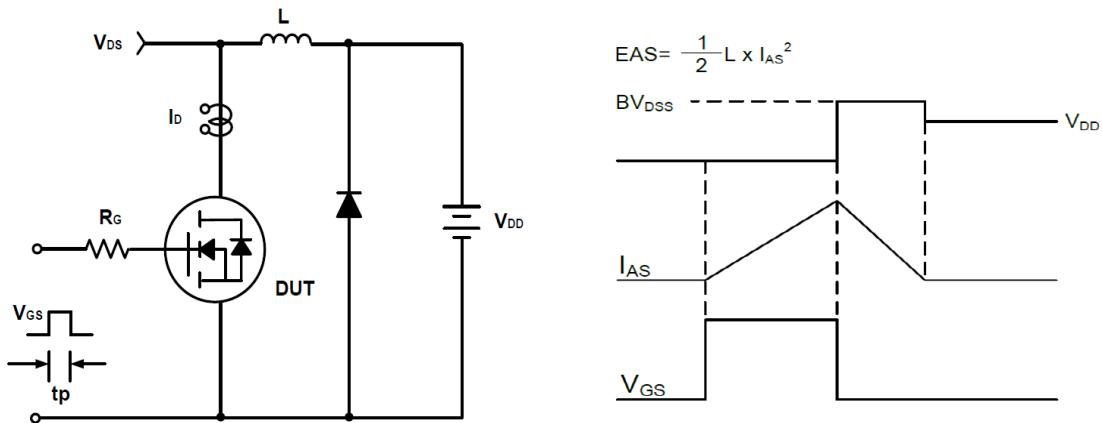
Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
$V_{(BR)DSS}$	Drain- Source Breakdown Voltage	$VGS=0V$ $ID=250\mu A$	60	--	--	V
I_{DSS}	Zero Gate Voltage Drain current	$VDS=60V$, $VGS=0V$	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	$VGS=\pm 25V$, $VDS=0V$	--	--	± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$VDS=VGS$, $ID=250\mu A$	2	3	4	V
$R_{DS(ON)}$	Drain-Source On-State Resistance (Note4)	$VGS=10V$, $ID=33A$	--	9.3	13	$m\Omega$
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note5)						
C_{iss}	Input Capacitance	$VDS=25V$, $VGS=0V$, $F=1MHz$	--	2030	--	pF
C_{oss}	Output Capacitance		--	725	--	pF
C_{rss}	Reverse Transfer Capacitance		--	375	--	pF
Q_g	Total Gate Charge	$VDS=48V$ $ID=30A$ $VGS=10V$	--	50	--	nC
Q_{gs}	Gate-Source Charge		--	12	--	nC
Q_{gd}	Gate-Drain Charge		--	17	--	nC
Switching Characteristics (Note5)						
$t_{d(on)}$	Turn-on Delay Time	$VDD=30V$, $ID=30A$, $VGS=10V$, $RG=5\Omega$	--	14	--	nS
t_r	Turn-on Rise Time		--	13	--	nS
$t_{d(off)}$	Turn-off Delay Time		--	20	--	nS
t_f	Turn-off Fall Time		--	7.5	--	nS
Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)						
V_{SD}	Forward on voltage	$IS=30A$, $VGS=0V$	--	0.8	1.3	V

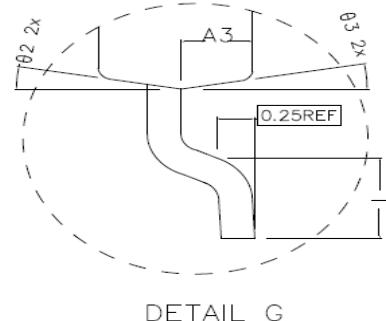
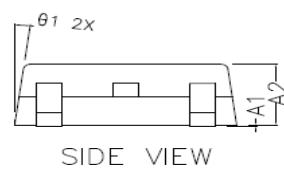

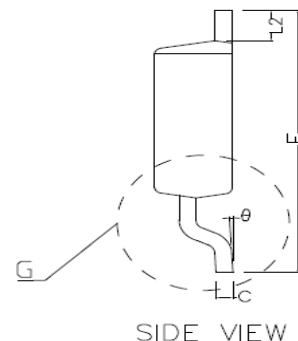
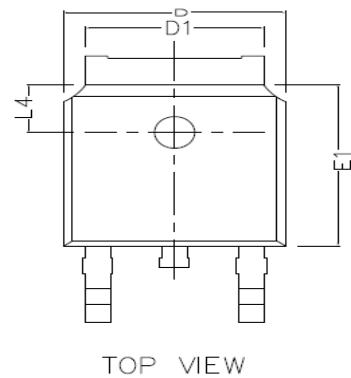
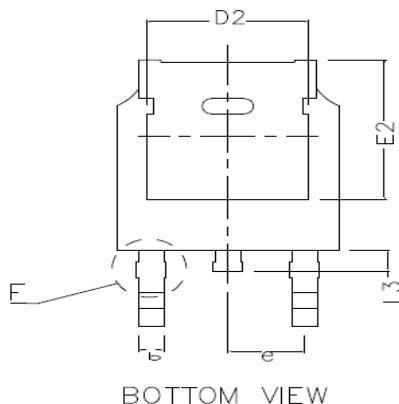
Note:

1. Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD =30V, VGS =10V. Part not recommended for use above this value.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. Surface Mounted on FR4 Board, $t \leq 10$ sec.
4. Pulse Test: pulse width ≤ 300 us, duty cycle $\leq 2\%$.
5. Guranteed by design, not subject to production testing.

**60V/65A N-Channel Advanced Power MOSFET
Typical Characteristics**

Figure1: TJ Junction Temperature (°C)

Figure3: TJ Junction Temperature (°C)

Figure2: ID Drain Current (A)

Figure4: VDS Drain-Source Voltage (A)

Figure5: VDS Drain-Source Voltage (V)

Figure6: Qg Gate Charge (nC)

60V/65A N-Channel Advanced Power MOSFET

Figure7: Vsd Source-Drain Voltage (V)

Figure8: Vgs Gate-Source Voltage (V)

Figure9: VDS Drain -Source Voltage (V)

Figure10: Square Wave Pulse Duration (sec)

60V/65A N-Channel Advanced Power MOSFET
Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

60V/65A N-Channel Advanced Power MOSFET
TO-252 Package Outline Dimensions (Units: mm)

**COMMON DIMENSIONS
(UNITS OF MEASURE IS mm)**

	MIN	NORMAL	MAX
A1	0.000	0.100	0.150
A2	2.200	2.300	2.400
A3	1.020	1.070	1.120
b	0.710	0.760	0.810
c	0.460	0.508	0.550
D	6.500	6.600	6.700
D1	5.330REF		
D2	4.830REF		
E	9.900	10.100	10.300
E1	6.000	6.100	6.200
E2	5.600REF		
e	2.286TYPE		
L	1.400	1.550	1.700
L2	1.10REF		
L3	0.80REF		
L4	1.80REF		
θ	0~8°		
θ1	7° TYPE		
θ2	10° TYPE		
θ3	10° TYPE		