



## 60V/20A N-Channel Advanced Power MOSFET

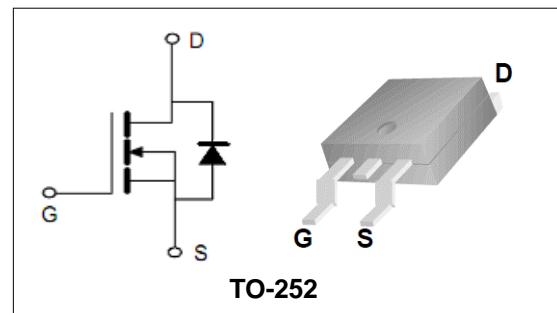
**Features**

- Improved dv/dt Capability, High Ruggedness.
- Maximum Junction Temperature Range (150°C)
- 100% Avalanche Tested

BVDSS	60	V
ID	20	A
RDSON@VGS=10V	22	mΩ

**Applications**

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)

**Order Information**

Product	Package	Marking	Reel Size	Reel	Carton
PTD20N06	TO-252	PTD20N06	13inch	2500PCS	50000PCS

**Absolute Maximum Ratings**

Symbol	Parameter	Rating	Unit
<b>Common Ratings (TC=25°C Unless Otherwise Noted)</b>			
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	60	V
$V_{GS}$	Gate-Source Voltage	±20	V
$T_J$	Maximum Junction Temperature	150	°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$I_S$	Diode Continuous Forward Current	20	A
<b>Mounted on Large Heat Sink</b>			
$E_{AS}$	Single Pulse Avalanche Energy (Note1)	72	mJ
$I_{DM}$	Pulse Drain Current Tested (Silicon Limit) (Note2)	60	A
$I_D$	Continuous Drain current	20	A
$P_D$	Maximum Power Dissipation	40	W
$R_{θJC}$	Thermal Resistance Junction-to-Case (Note3)	3.7	°C/W

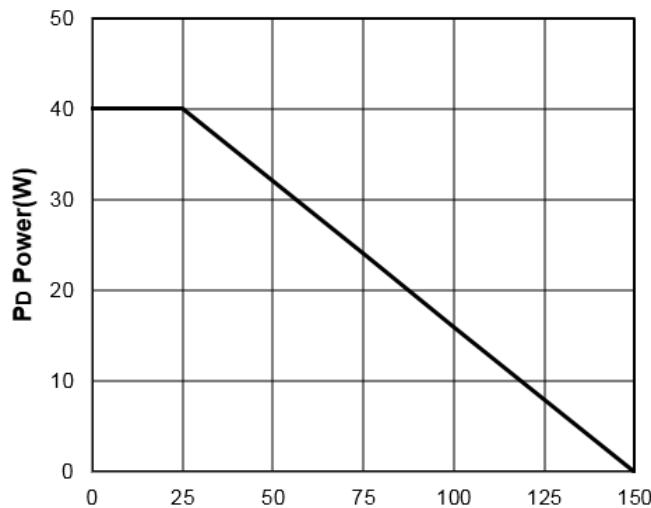
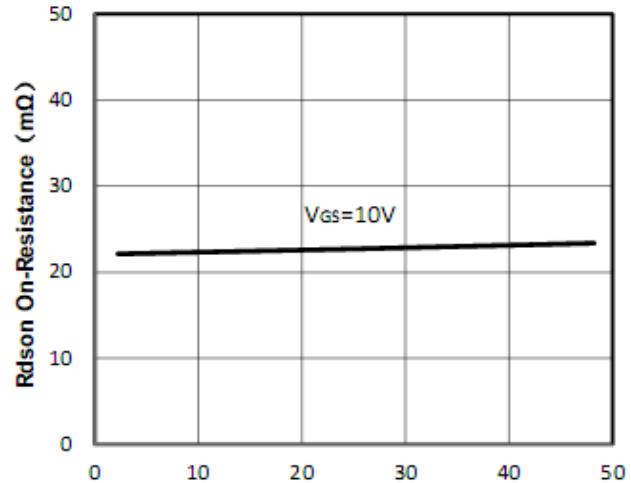
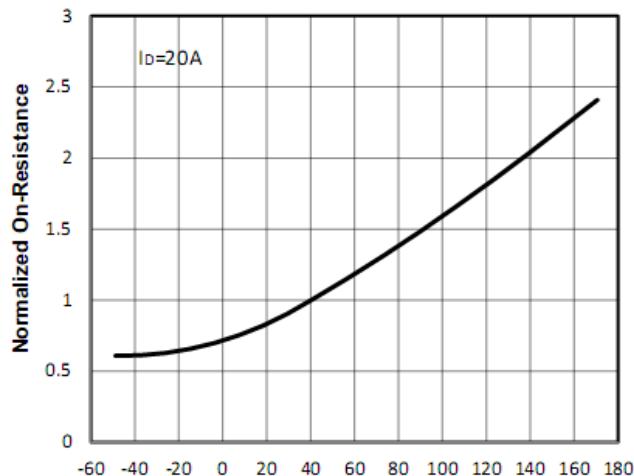
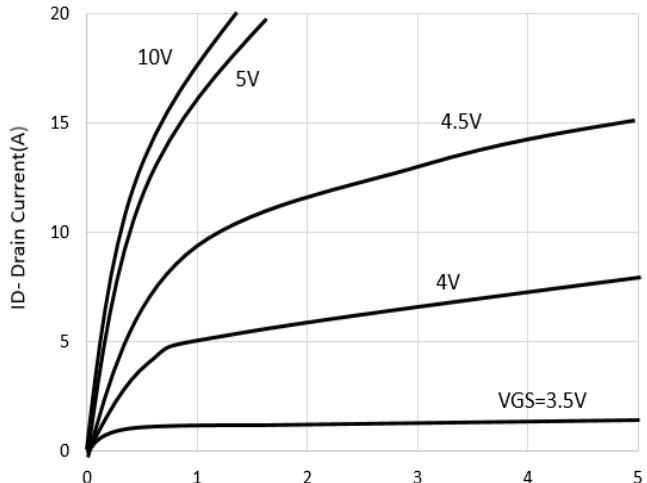
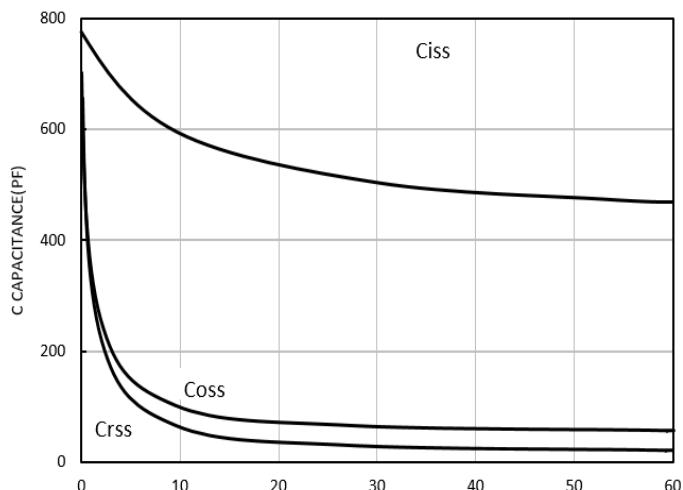
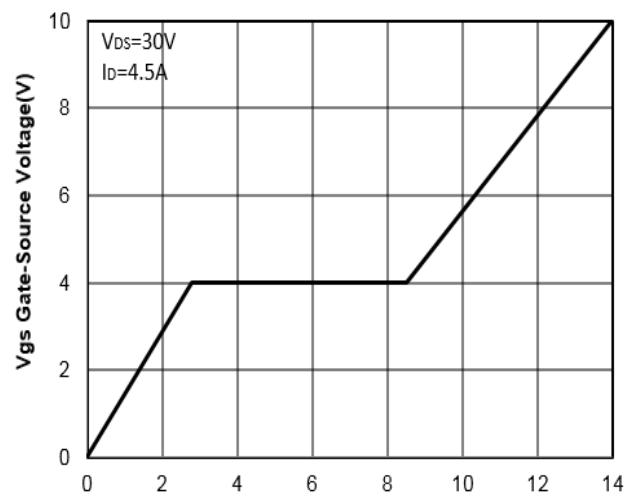


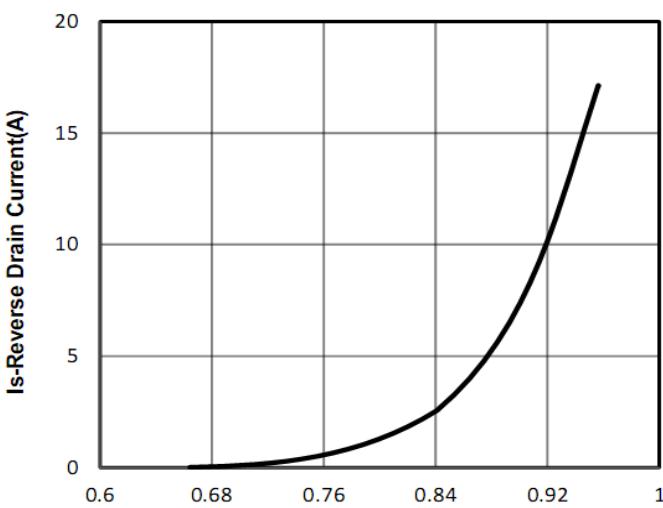
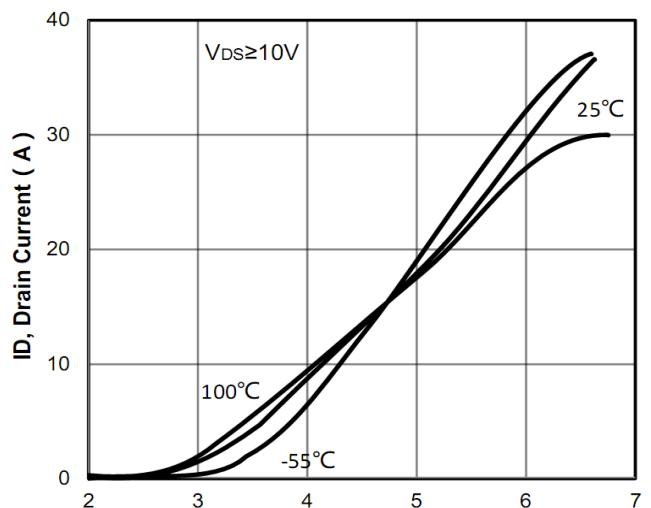
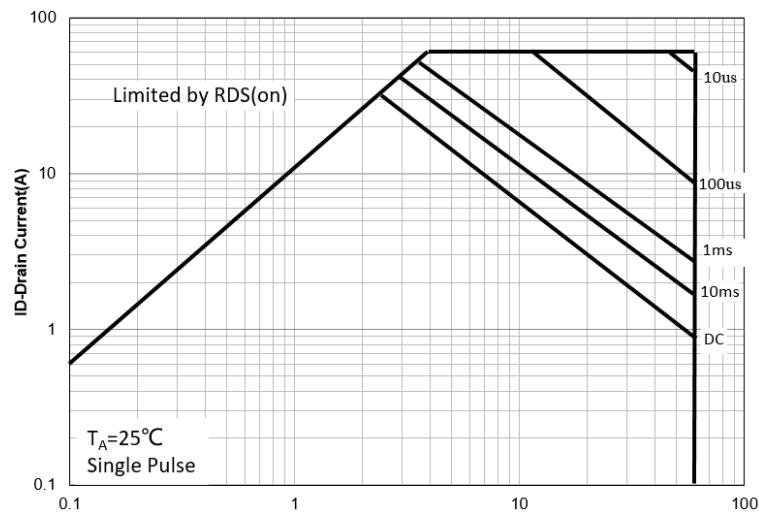
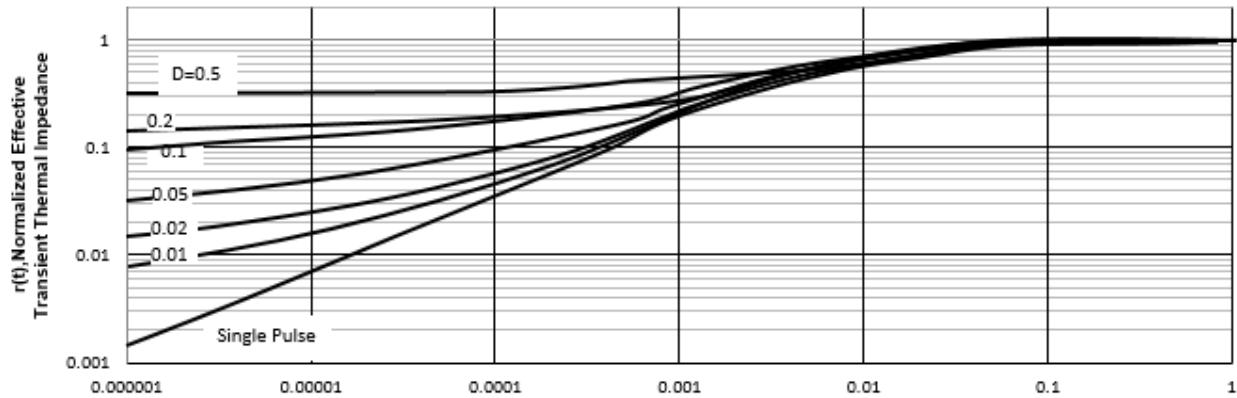
## 60V/20A N-Channel Advanced Power MOSFET

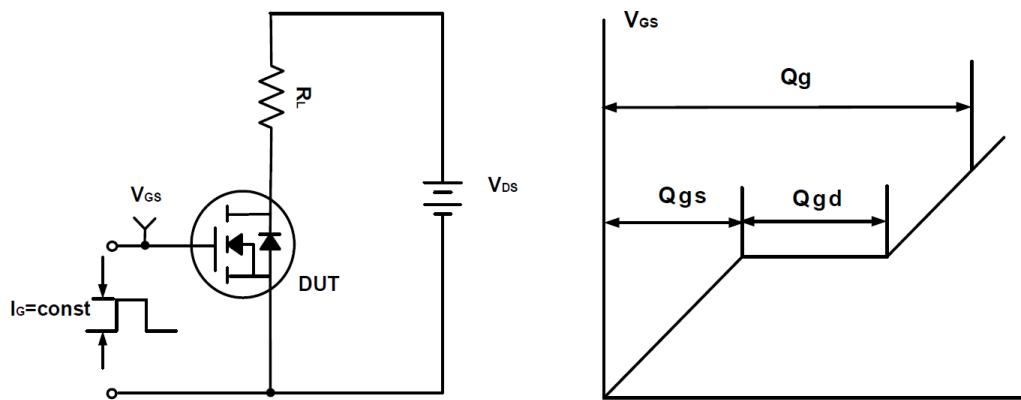
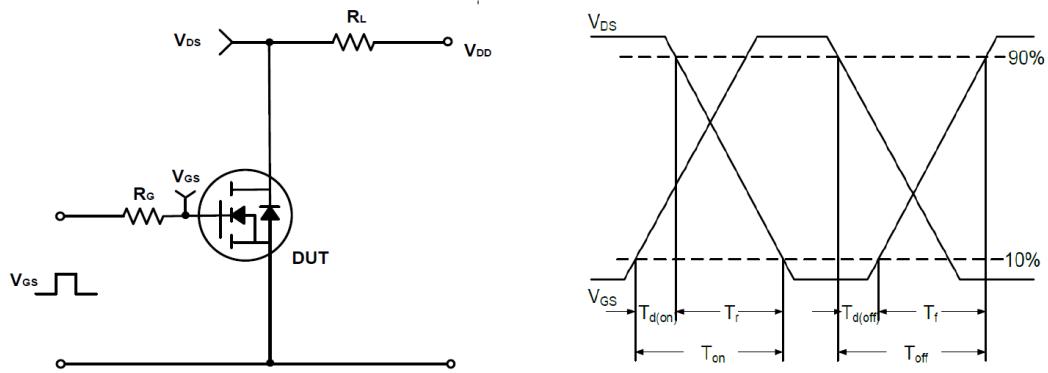
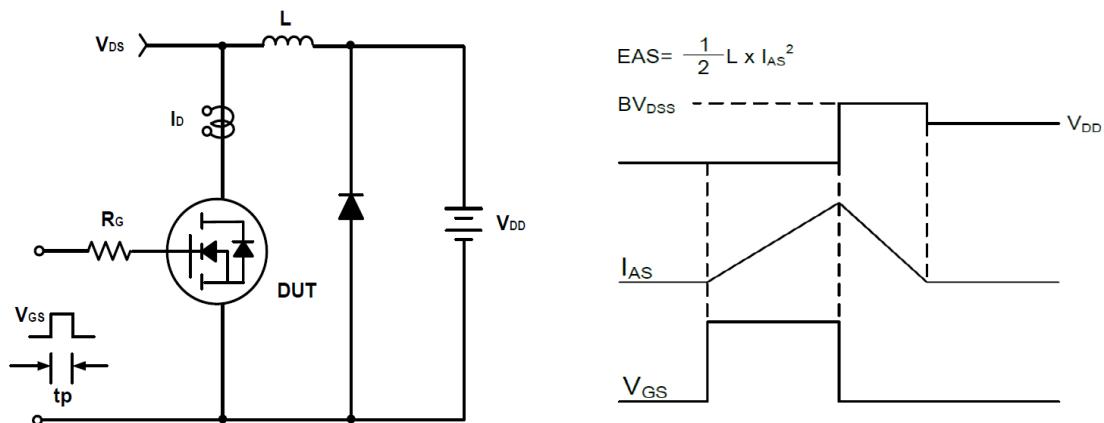
Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
<b>Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)</b>						
$V_{(BR)DSS}$	Drain- Source Breakdown Voltage	$VGS=0V$ ID=250µA	60	--	--	V
$I_{DSS}$	Zero Gate Voltage Drain current	$VDS=60V, VGS=0V$	--	--	1	µA
$I_{GSS}$	Gate-Body Leakage Current	$VGS=\pm 20V, VDS=0V$	--	--	$\pm 100$	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$VDS=VGS, ID=250\mu A$	1	2	3	V
$R_{DS(ON)}$	Drain-Source On-State Resistance (Note4)	$VGS=10V, ID=20A$	--	22	30	mΩ
<b>Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note5)</b>						
$C_{iss}$	Input Capacitance	$VDS=30V,$ $VGS=0V,$ $F=1MHz$	--	500	--	pF
$C_{oss}$	Output Capacitance		--	60	--	pF
$C_{rss}$	Reverse Transfer Capacitance		--	25	--	pF
$Q_g$	Total Gate Charge	$VDS=30V$ $ID=4.5A$ $VGS=10V$	--	14	--	nC
$Q_{gs}$	Gate-Source Charge		--	2.9	--	nC
$Q_{gd}$	Gate-Drain Charge		--	5.2	--	nC
<b>Switching Characteristics (Note5)</b>						
$t_{d(on)}$	Turn-on Delay Time	$VDD=30V,$ $ID=2A, RL=6.7\Omega$ $VGS=10V,$ $RG=3\Omega$	--	5	--	nS
$t_r$	Turn-on Rise Time		--	2.6	--	nS
$t_{d(off)}$	Turn-off Delay Time		--	16.1	--	nS
$t_f$	Turn-off Fall Time		--	2.3	--	nS
<b>Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)</b>						
$V_{SD}$	Forward on voltage	$IS=20A, VGS=0V$	--	--	1.2	V

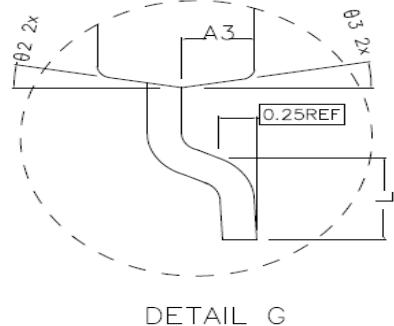
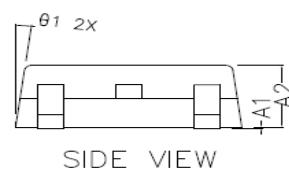

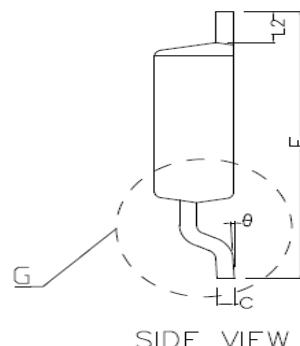
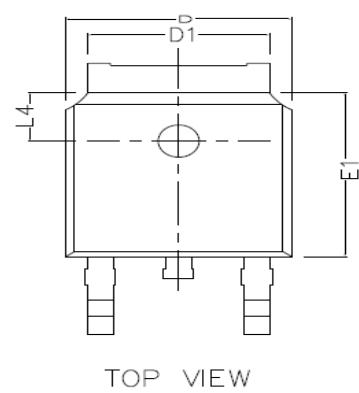
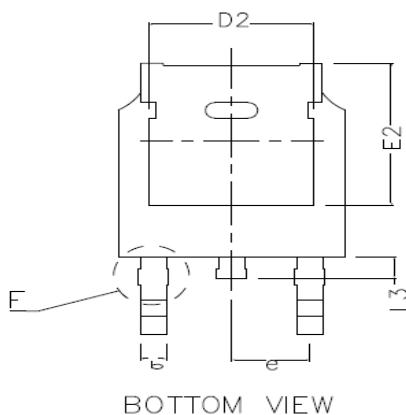
Note:

1. Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD =30V, VGS =10V. Part not recommended for use above this value.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. Surface Mounted on FR4 Board, t ≤ 10 sec.
4. Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
5. Guranteed by design, not subject to production testing.

**60V/20A N-Channel Advanced Power MOSFET**
**Typical Characteristics**

**Figure1: TJ Junction Temperature (°C)**

**Figure2: Id Drain Current (A)**

**Figure3: TJ Junction Temperature (°C)**

**Figure4: Vds Drain-Source Voltage (V)**

**Figure5: Vds Drain-Source Voltage (V)**

**Figure6: Qg Gate Charge (nC)**

**60V/20A N-Channel Advanced Power MOSFET**

**Figure7: V<sub>sd</sub> Source-Drain Voltage (V)**

**Figure8: V<sub>gs</sub> Gate-Source Voltage (V)**

**Figure9: V<sub>ds</sub> Drain Source Voltage (V)**

**Figure10: Square Wave Pulse Duration (sec)**

**60V/20A N-Channel Advanced Power MOSFET**
**Test Circuit and Waveform:**

**Figure A Gate Charge Test Circuit & Waveforms**

**Figure B Switching Test Circuit & Waveforms**

**Figure C Unclamped Inductive Switching Circuit & Waveforms**

**60V/20A N-Channel Advanced Power MOSFET**
**TO-252 Package Outline Dimensions (Units: mm)**


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A1	0.000	0.100	0.150
A2	2.200	2.300	2.400
A3	1.020	1.070	1.120
b	0.710	0.760	0.810
c	0.460	0.508	0.550
D	6.500	6.600	6.700
D1	5.330REF		
D2	4.830REF		
E	9.900	10.100	10.300
E1	6.000	6.100	6.200
E2	5.600REF		
e	2.286TYPE		
L	1.400	1.550	1.700
L2	1.10REF		
L3	0.80REF		
L4	1.80REF		
θ	0~8°		
θ1	7° TYPE		
θ2	10° TYPE		
θ3	10° TYPE		