



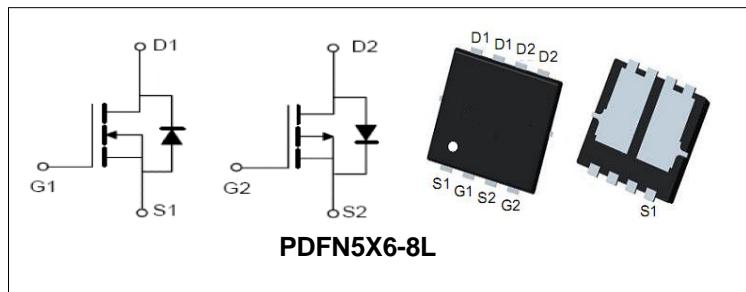
N And P- Channel Enhancement Mode Power MOSSFET

Features

- Improved dv/dt Capability, High Ruggedness
- Maximum Junction Temperature Range (150°C)

Applications

- DC Fan
- Brushless motor
- Optimized for Power Management Applications for Portable Products, such as H-bridge, Inverters Car Charger and Others



N-Channel		
BVDSS	30	V
ID	25	A
RDSON@VGS=10V	8.6	mΩ
RDSON@VGS=4.5V	15	mΩ

P-Channel		
BVDSS	-30	V
ID	-25	A
RDSON@VGS=-10V	17	mΩ
RDSON@VGS=-5V	24	mΩ

Order Information

Product	Package	Marking	Reel Size	Reel	Carton
PTN25C03	PDFN5X6-8L	PTN25C03	13inch	5000PCS	50000PCS

Absolute Maximum Ratings

Symbol	Parameter	N-Channel	P-Channel	Unit	
Common Ratings (TC=25°C Unless Otherwise Noted)					
V _{(BR)DSS}	Drain-Source Breakdown Voltage	30	-30	V	
V _{GS}	Gate-Source Voltage	±20	±20	V	
T _J	Maximum Junction Temperature	150		°C	
T _{STG}	Storage Temperature Range	-50 to 150		°C	
I _S	Diode Continuous Forward Current	TC =25°C	25	-25	A
Mounted on Large Heat Sink					
I _{DM}	Pulse Drain Current Tested (Silicon Limit) (Note1)	TC =25°C	75	-75	A
I _D	Continuous Drain current	TC =25°C	25	-25	A
P _D	Maximum Power Dissipation	TC =25°C	35		W
R _{θJC}	Thermal Resistance Junction-to-Case (Note2)		3.57		°C/W



N And P- Channel Enhancement Mode Power MOSSFET

N-Channel Electrical Characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise stated)						
$V_{(\text{BR})\text{DSS}}$	Drain- Source Breakdown Voltage	$V_{GS}=0\text{V}$ $ID=250\mu\text{A}$	30	--	--	V
I_{DSS}	Zero Gate Voltage Drain current	$V_{DS}=30\text{V}, V_{GS}=0\text{V}$	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 20\text{V}, V_{DS}=0\text{V}$	--	--	± 100	nA
$V_{\text{GS}(\text{TH})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, ID=250\mu\text{A}$	1	1.6	2.5	V
$R_{\text{DS}(\text{ON})}$	Drain-Source On-State Resistance (Note3)	$V_{GS}=10\text{V}, ID=20\text{A}$	--	8.6	13	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, ID=10\text{A}$	--	15	18	$\text{m}\Omega$
Dynamic Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise stated) (Note4)						
C_{iss}	Input Capacitance	$V_{DS}= 15\text{V},$ $V_{GS}=0\text{V},$ $F=1\text{MHz}$	--	1060	--	pF
C_{oss}	Output Capacitance		--	161	--	pF
C_{rss}	Reverse Transfer Capacitance		--	138	--	pF
Q_g	Total Gate Charge	$V_{DS}= 15\text{V},$ $ID= 20\text{A},$ $V_{GS}= 10\text{V}$	--	12	--	nC
Q_{gs}	Gate-Source Charge		--	3	--	nC
Q_{gd}	Gate-Drain Charge		--	4	--	nC
Switching Characteristics (Note4)						
$t_{\text{d(on)}}$	Turn-on Delay Time	$V_{DD}=15\text{V},$ $ID=20\text{A},$ $V_{GS}=10\text{V},$ $RG=1.8\Omega$	--	6	--	nS
t_r	Turn-on Rise Time		--	11	--	nS
$t_{\text{d(off)}}$	Turn-off Delay Time		--	12	--	nS
t_f	Turn-off Fall Time		--	5	--	nS
Source- Drain Diode Characteristics@ $T_J = 25^\circ\text{C}$ (unless otherwise stated)						
V_{SD}	Forward on voltage (Note3)	$IS=20\text{A}, V_{GS}=0\text{V}$	--	0.82	1.2	V



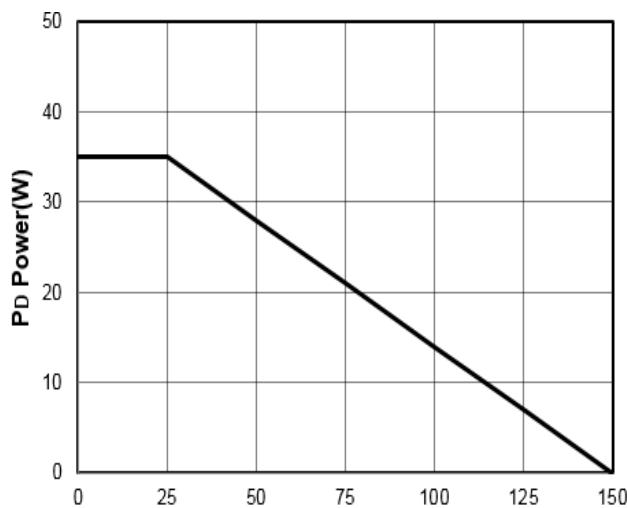
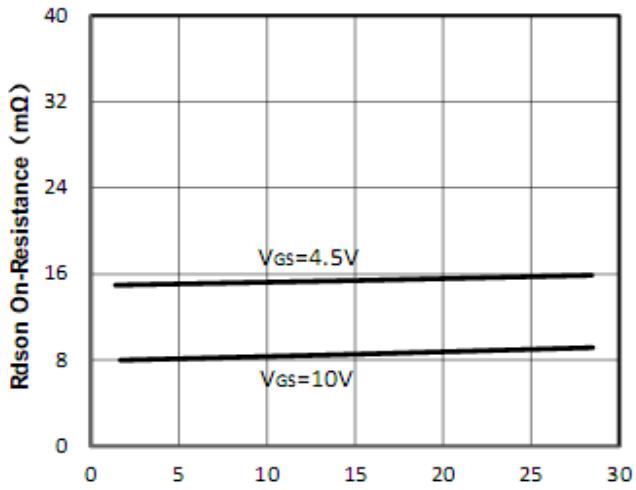
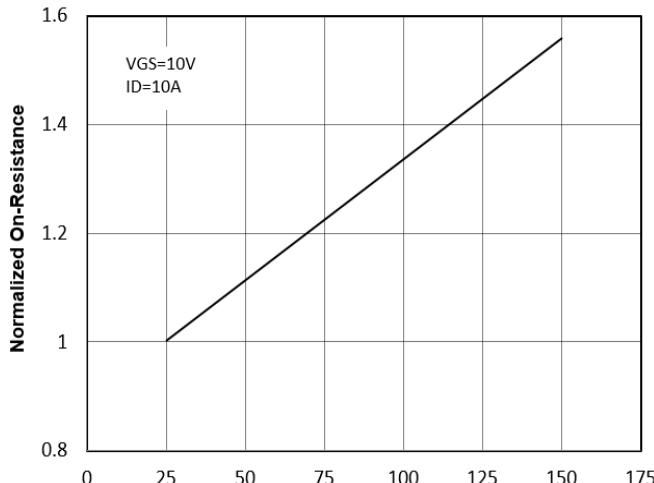
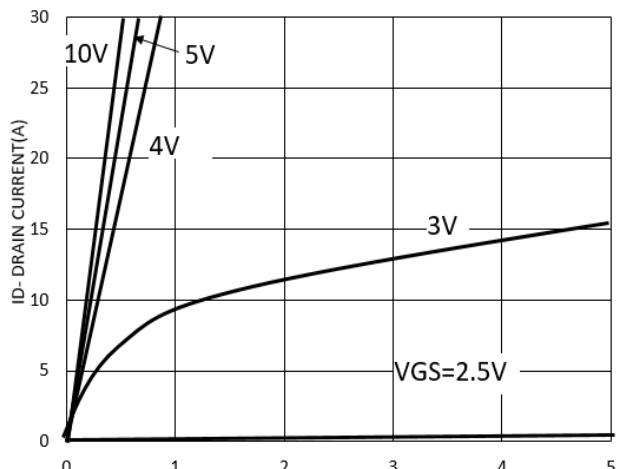
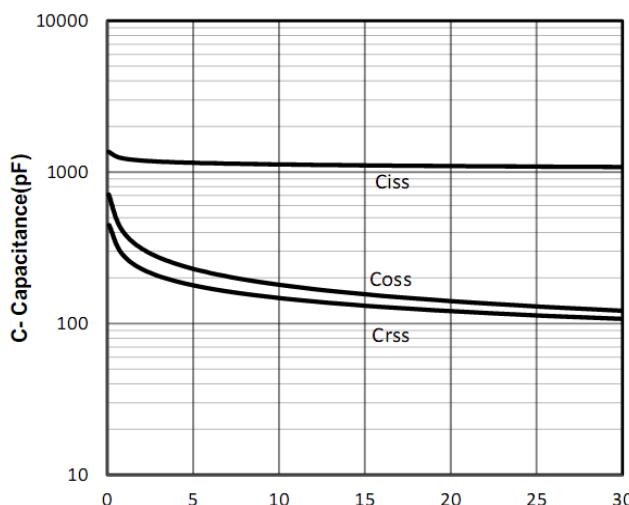
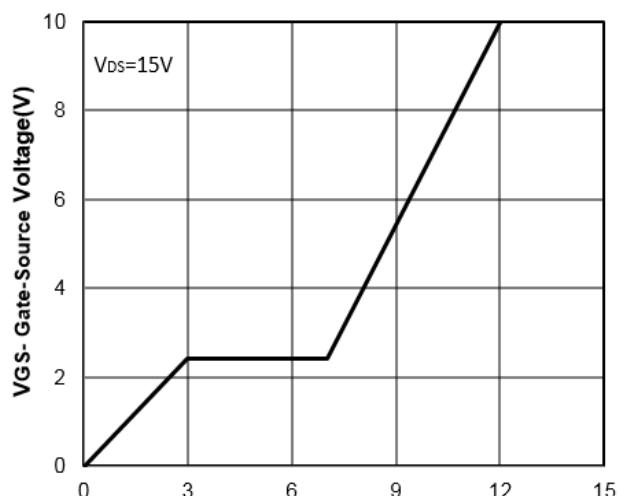
N And P- Channel Enhancement Mode Power MOSSFET

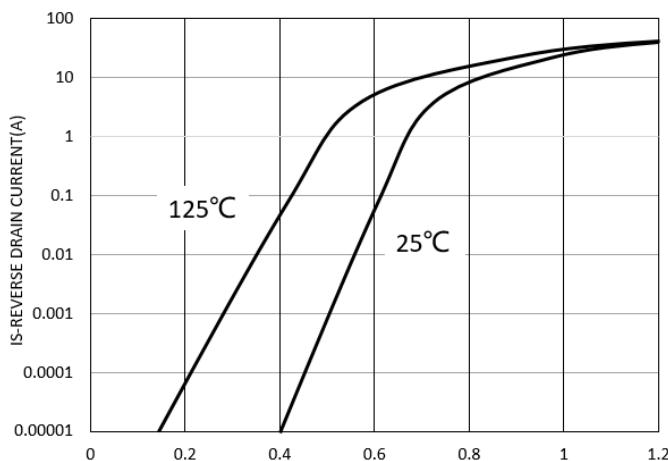
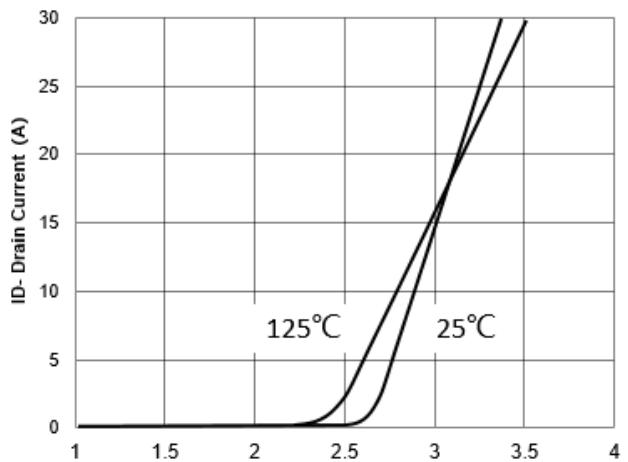
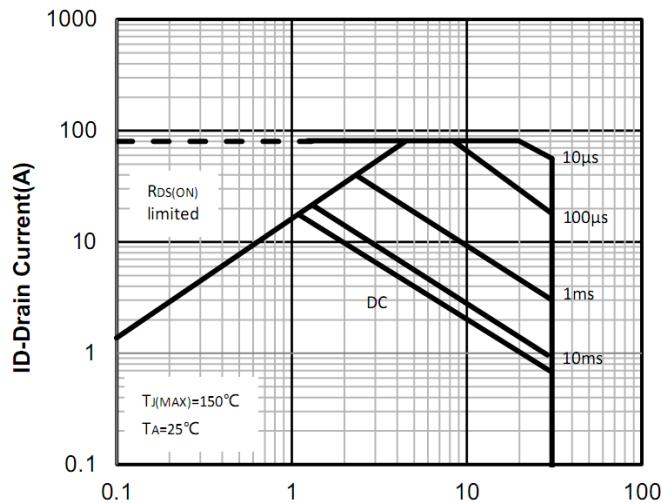
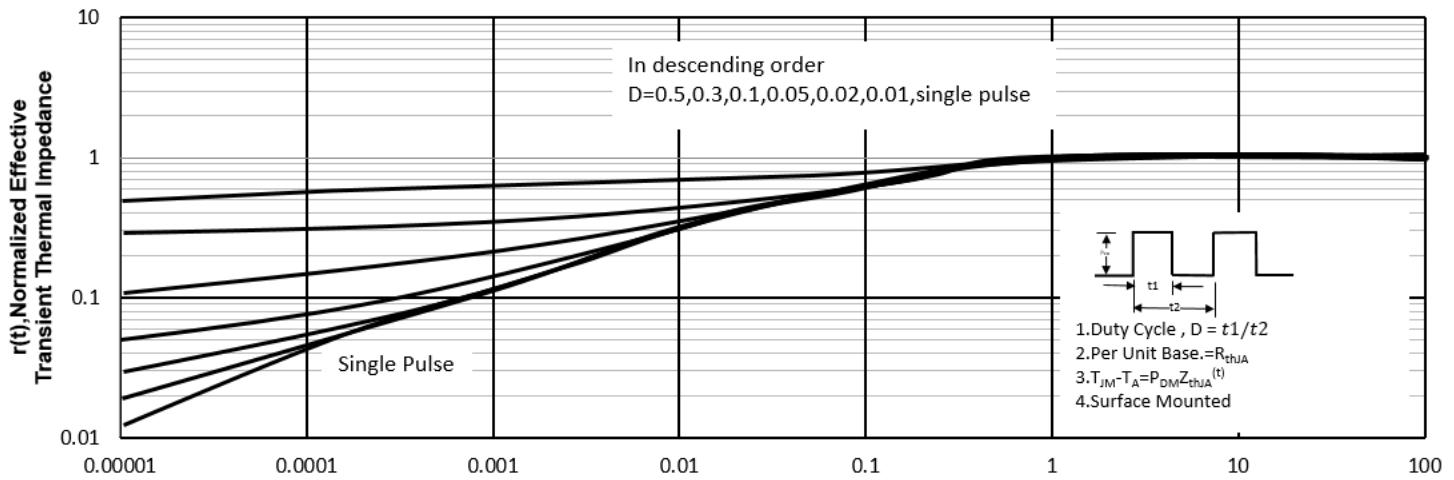
P-Channel Electrical Characteristics

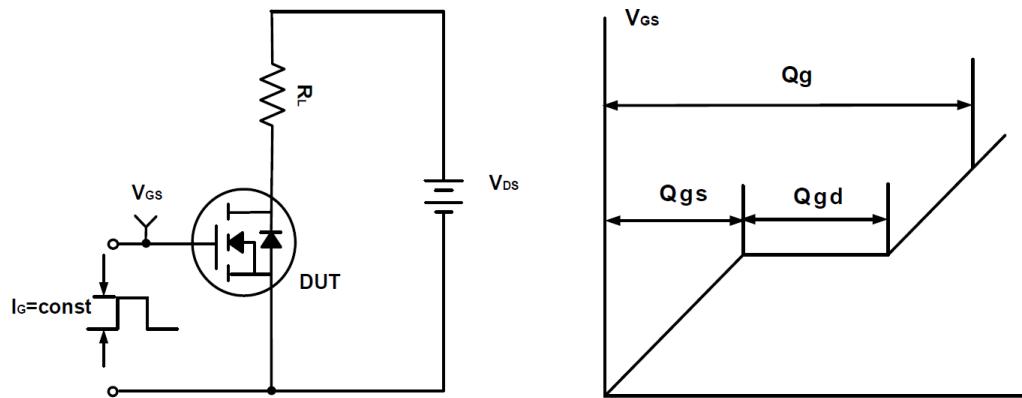
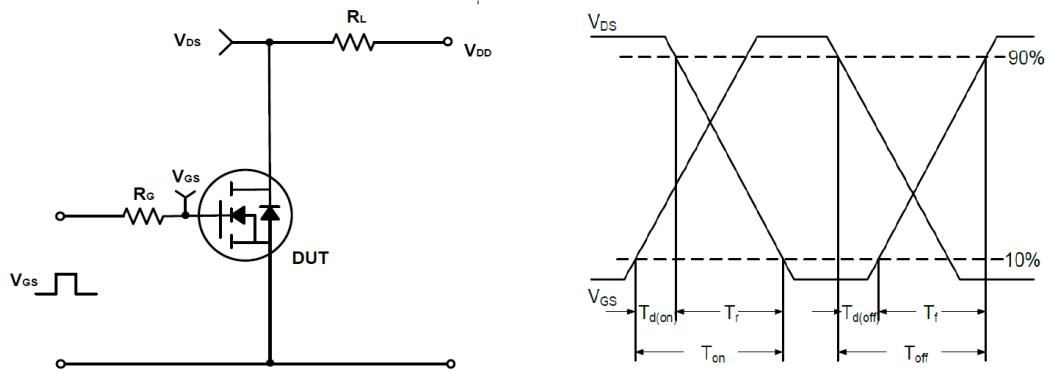
Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain- Source Breakdown Voltage	VGS=0V ID=-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain current	VDS=-30V,VGS=0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	VGS=±20V,VDS=0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	VDS=VGS, ID=-250μA	-1.0	-2	-2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance (Note3)	VGS=-10V, ID=-10.5A	--	17	22	mΩ
		VGS=-5V, ID=-6A	--	24	33	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note4)						
C _{iss}	Input Capacitance	VDS= -15V, VGS=0V, F=1MHz	--	1495	--	pF
C _{oss}	Output Capacitance		--	166	--	pF
C _{rss}	Reverse Transfer Capacitance		--	150	--	pF
Q _g	Total Gate Charge	VDS= -15V, ID= -15A,	--	81	--	nC
Q _{gs}	Gate-Source Charge		--	12	--	nC
Q _{gd}	Gate-Drain Charge		--	9.7	--	nC
Switching Characteristics (Note4)						
t _{d(on)}	Turn-on Delay Time	VDD= - 15V, ID= -15A, VGS= -10V, RG=3Ω	--	17	--	nS
t _r	Turn-on Rise Time		--	21	--	nS
t _{d(off)}	Turn-off Delay Time		--	36	--	nS
t _f	Turn-off Fall Time		--	15	--	nS
Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage (Note3)	IS=-20A, VGS=0V	--	-0.8	-1.2	V

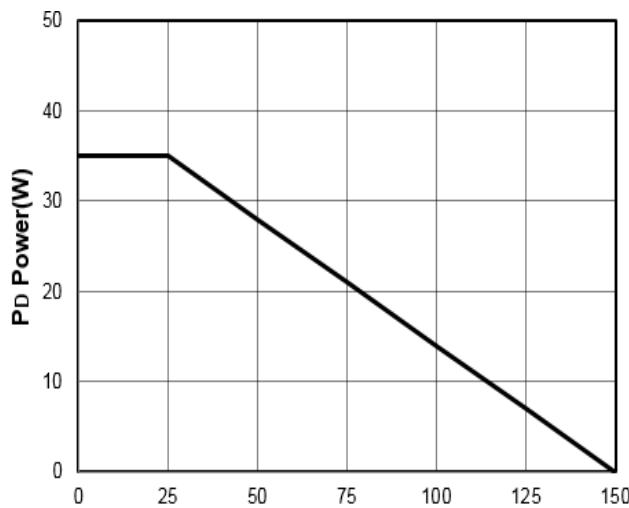
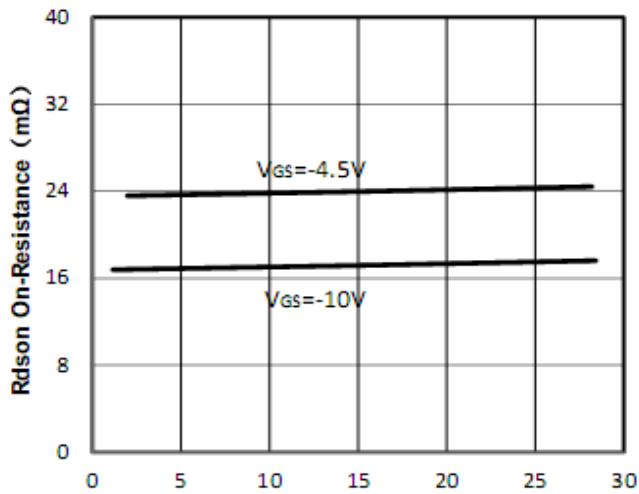
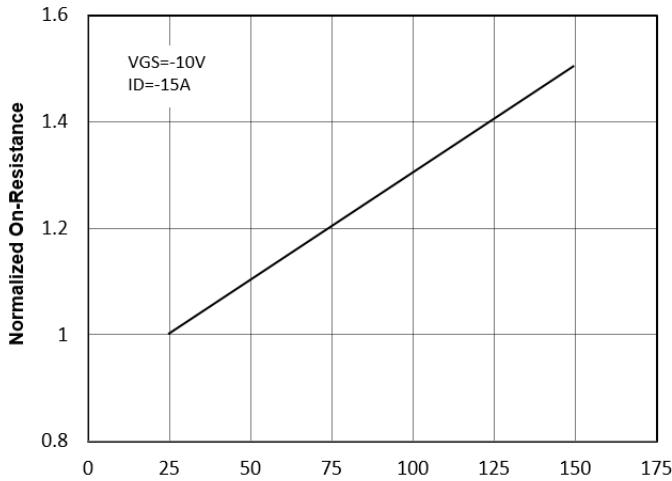
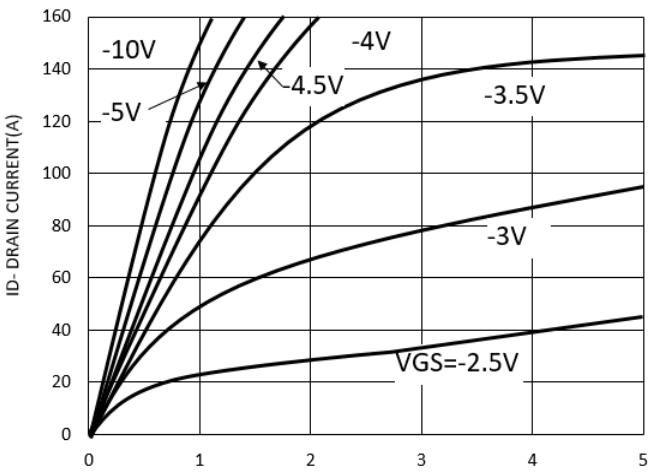
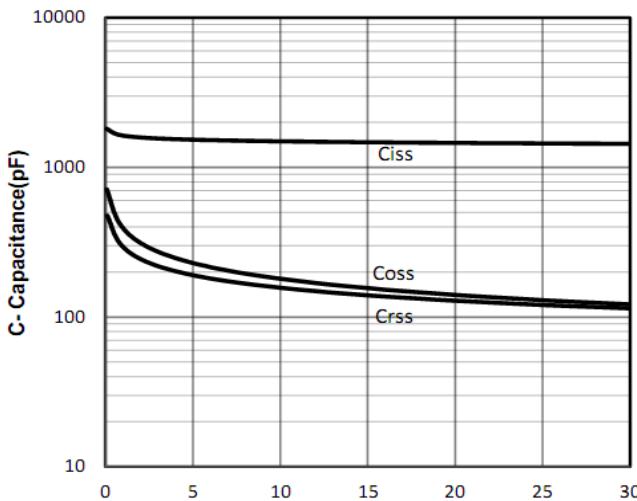
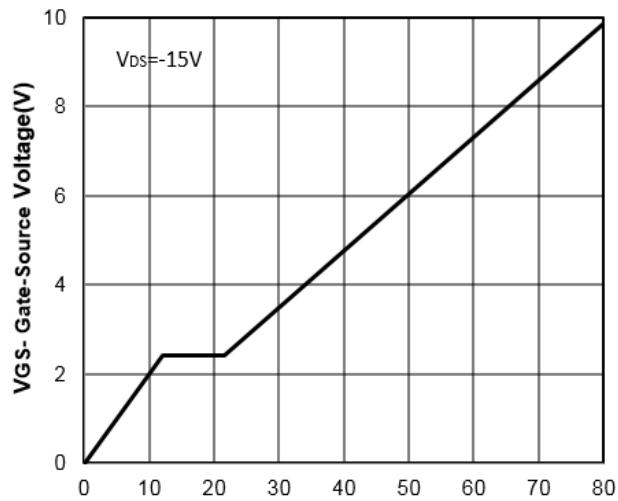
Note:

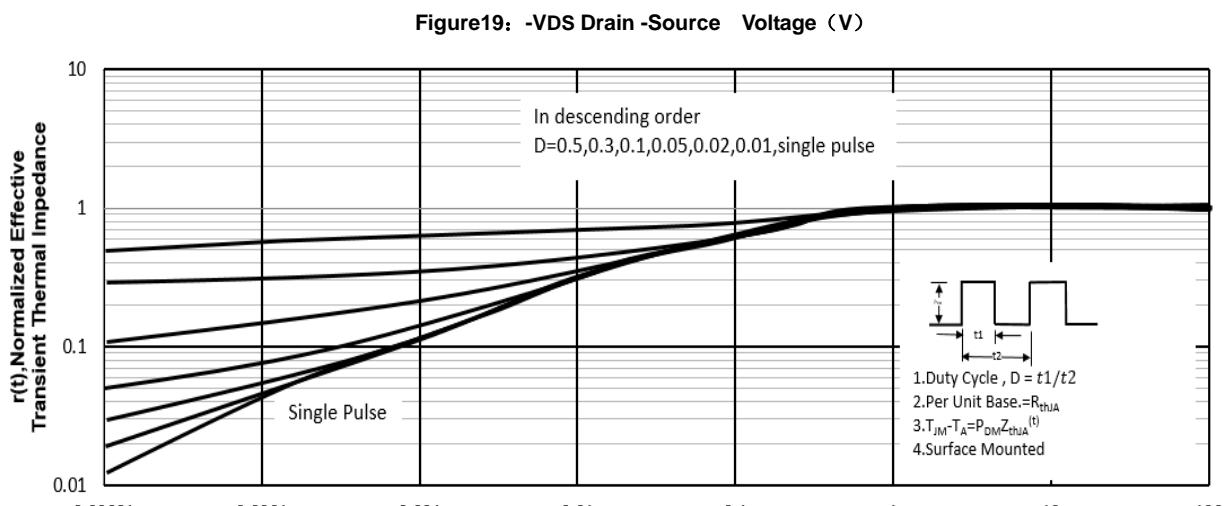
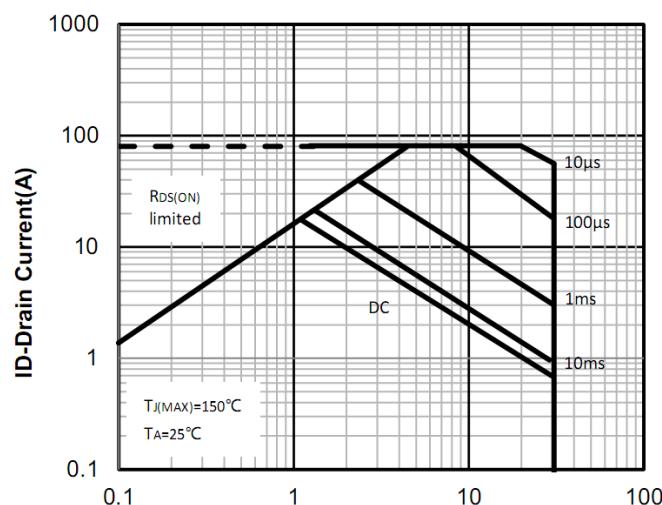
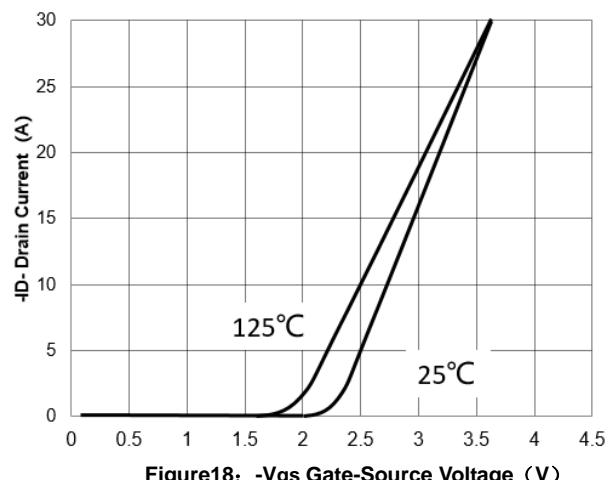
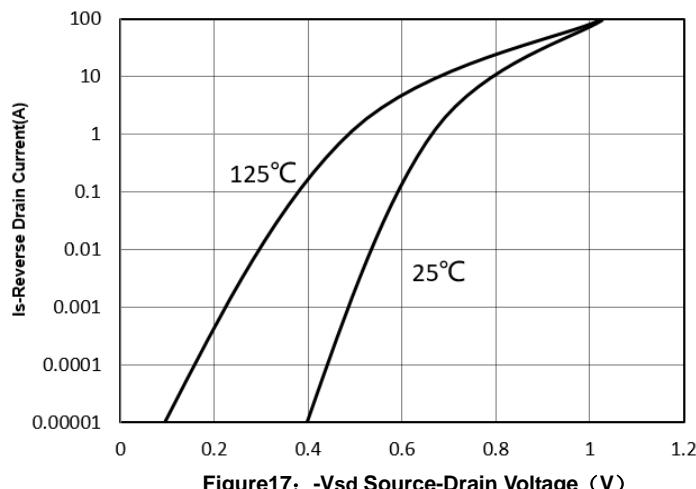
1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec
3. Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
4. Guaranteed by design, not subject to production testing.

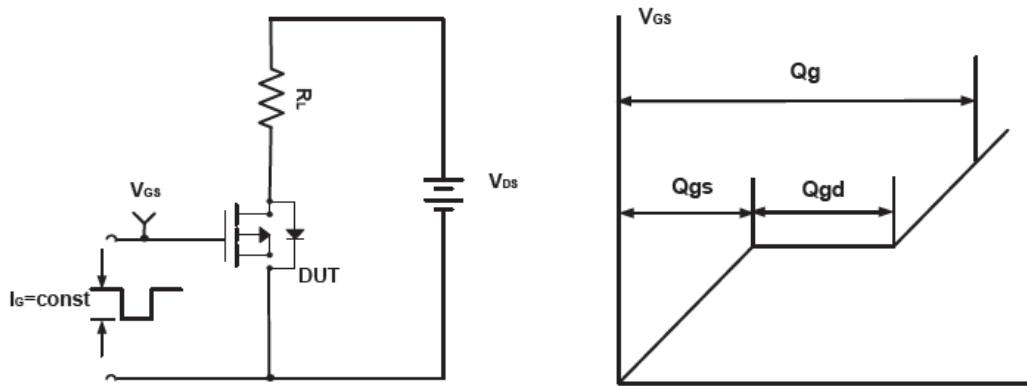
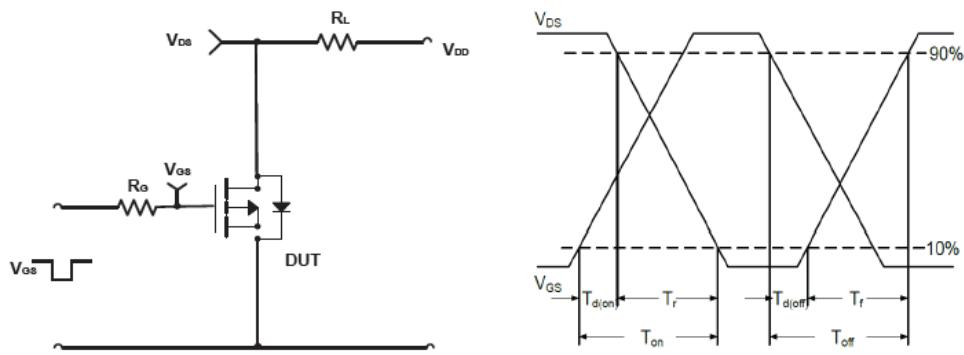
N And P- Channel Enhancement Mode Power MOSSFET
Typical Characteristics (N-Channel)

Figure1: TJ Junction Temperature (°C)

Figure2: ID Drain Current (A)

Figure3: TJ Junction Temperature (°C)

Figure4: VDS Drain-Source Voltage (V)

Figure5: VDS Drain-Source Voltage (V)

Figure6: Qg Gate Charge (nC)

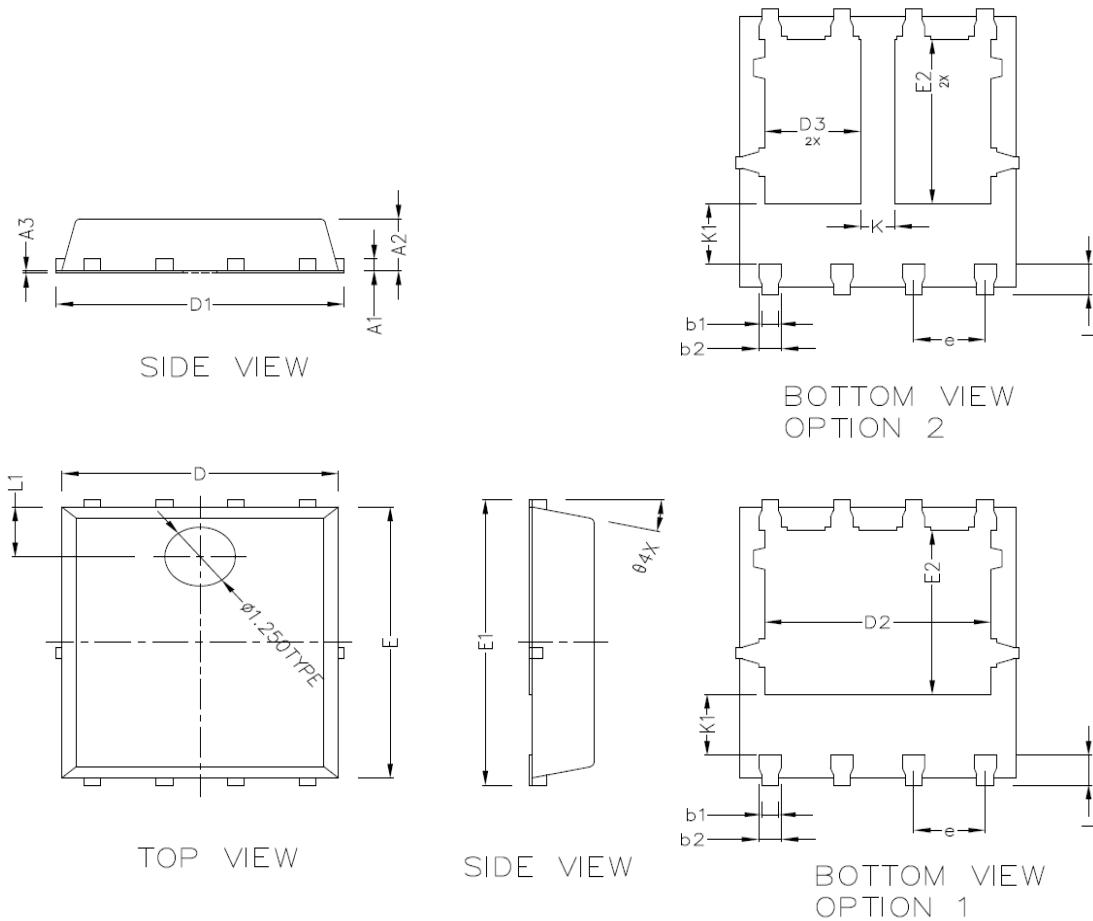
N And P- Channel Enhancement Mode Power MOSSFET

Figure7: Vsd Source-Drain Voltage (V)

Figure8: Vgs Gate-Source Voltage (V)

Figure9: VDS Drain -Source Voltage (V)

Figure10: Square Wave Pulse Duration (sec)

N And P- Channel Enhancement Mode Power MOSSFET
Test Circuit and Waveform(N-Channel):

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

N And P- Channel Enhancement Mode Power MOSSFET
Typical Characteristics (P-Channel)

Figure11: TJ Junction Temperature (°C)

Figure12: -Id Drain Current (A)

Figure13: TJ Junction Temperature (°C)

Figure14: -Vds Drain-Source Voltage (V)

Figure15: -Vds Drain-Source Voltage (V)

Figure16: Qg Gate Charge (nC)

N And P- Channel Enhancement Mode Power MOSSFET


N And P- Channel Enhancement Mode Power MOSSFET
Test Circuit and Waveform (P-Channel):

Figure D Gate Charge Test Circuit & Waveforms

FigureE Switching Test Circuit & Waveforms

N And P- Channel Enhancement Mode Power MOSFET
PDFN5X6-8L Package Outline Dimensions (Units: mm)


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A1		0.254 BSC	
A2	1.000	1.100	1,200
A3	0.006	—	0.020
b1	0.250	0.300	0.360
b2	0.350	0.400	0.460
D	4.800	4.900	5.000
D1	5.000	5.100	5.200
D2	3.910	4.010	4.110
D3	1.605	1.705	1.805
E	5.650	5.750	5.850
E1	5.950	6.050	6.150
E2	3.375	3.475	3.575
e	1.270 TYPE		
L	0.530	0.630	0.730
L1	1.00REF		
theta	13° TYPE		
K	0.600 REF		
K1	1.235 REF		